


4940 Series

ZIF Socket

002-4940-001A

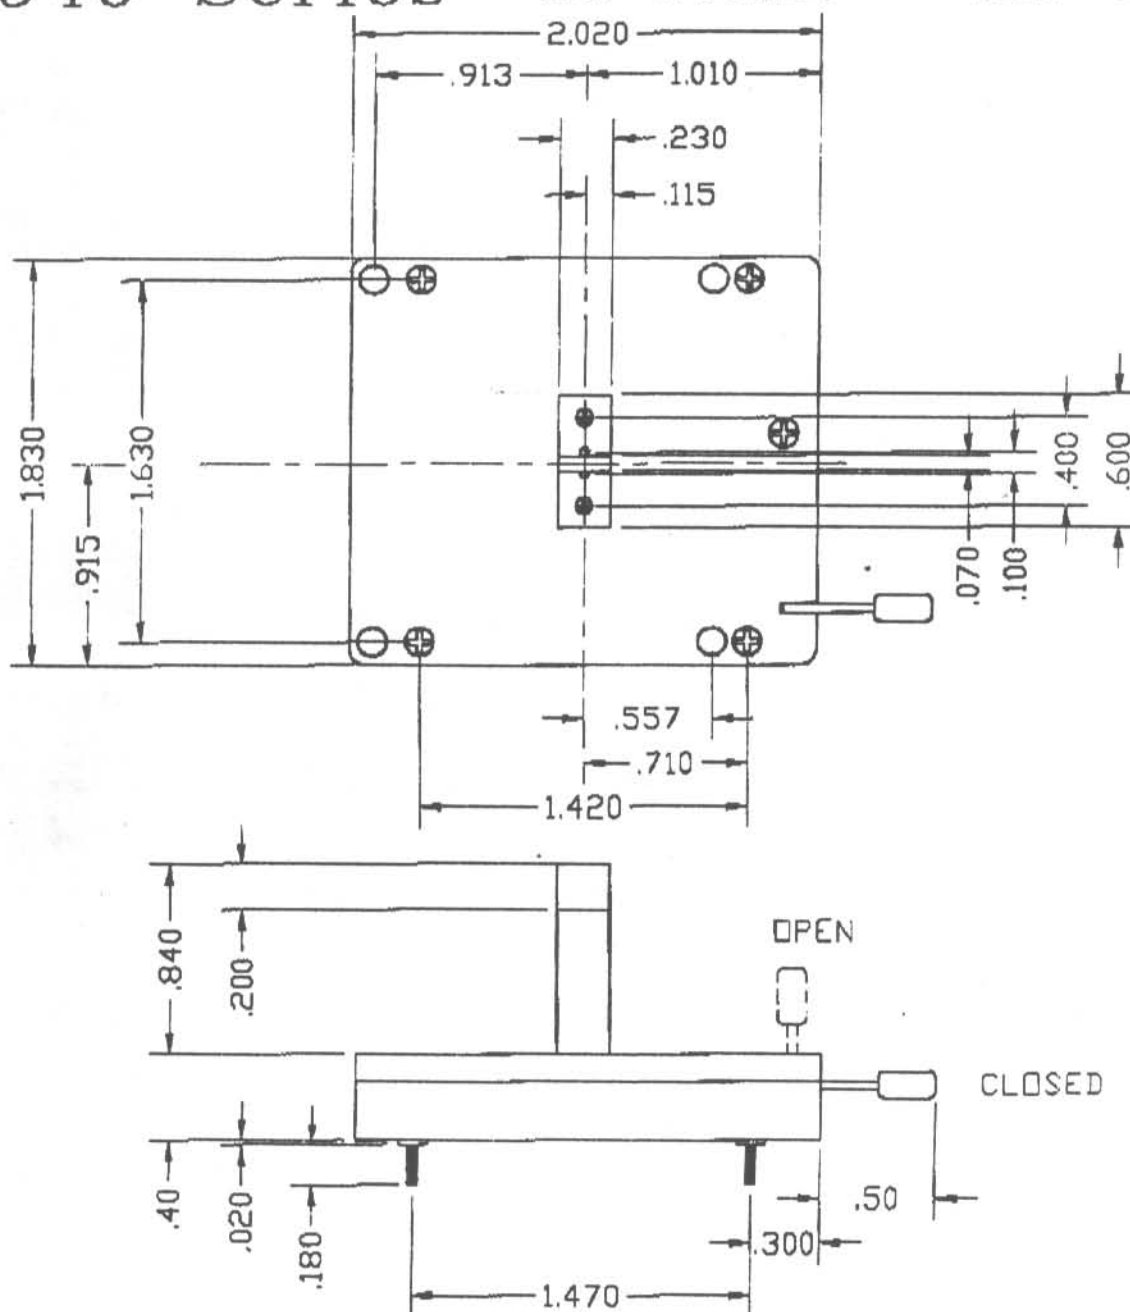

Physical Insulation material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-0
 Color: Green

Contact (.445" lg x .017" x .045")
 Material: Beryllium Copper
 Plating: 30 μ (.76 μ m) Gold-MIL-G-45204
 Type II, Grade C over 50 μ (1.3 μ m)
 Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
 Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)

Consult factory or your local TMC Distributor for design and pricing.
 Phone: 1-800-955-4707