
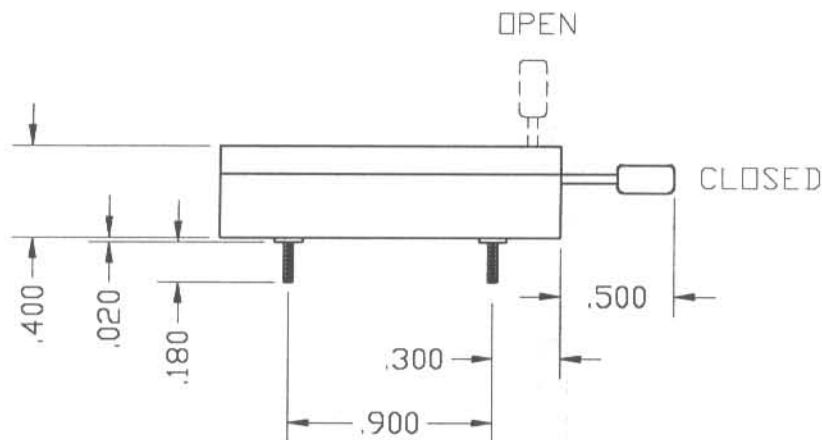


# 4940 Series

011-4940-001A

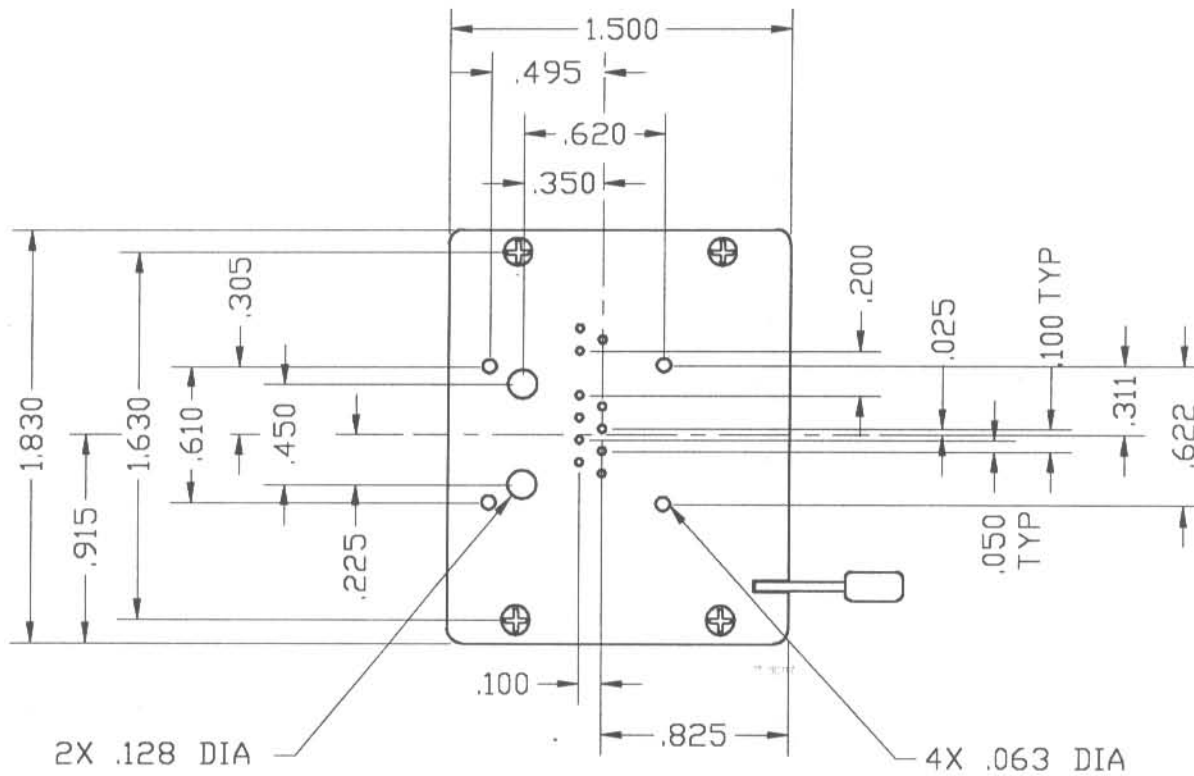

|                                                                                                              |                                                                                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Physical</b> Insulation material: Glass Reinforced; Polysulfone<br>Flammability: UL 94V-0<br>Color: Green | Contact (.130" lg x .010" x .028")<br>Material: Beryllium Copper<br>Plating: 30 $\mu$ "(.76 $\mu$ m)Gold-MIL-G-45204<br>Type II, Grade C over 50 $\mu$ "(1.3 $\mu$ m)<br>Sulfamate Nickel per QQ-N-290A |
|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Electrical** Current Rating: 1 Amp  
 Insulation Resistance:  $>1 \times 10^9 \Omega$  at 500Vdc  
 Withstanding Voltage: 1000 Vrms at Sea Level

**Environmental** Temperature Rating Operational:  $-67^\circ\text{F}(-55^\circ\text{C})$  to  $+302^\circ\text{F}(+150^\circ\text{C})$   
 Consult factory or your local TMC Distributor for design and pricing.  
 Phone: 1-800-955-4707