




4940 Series

014-4940-002A

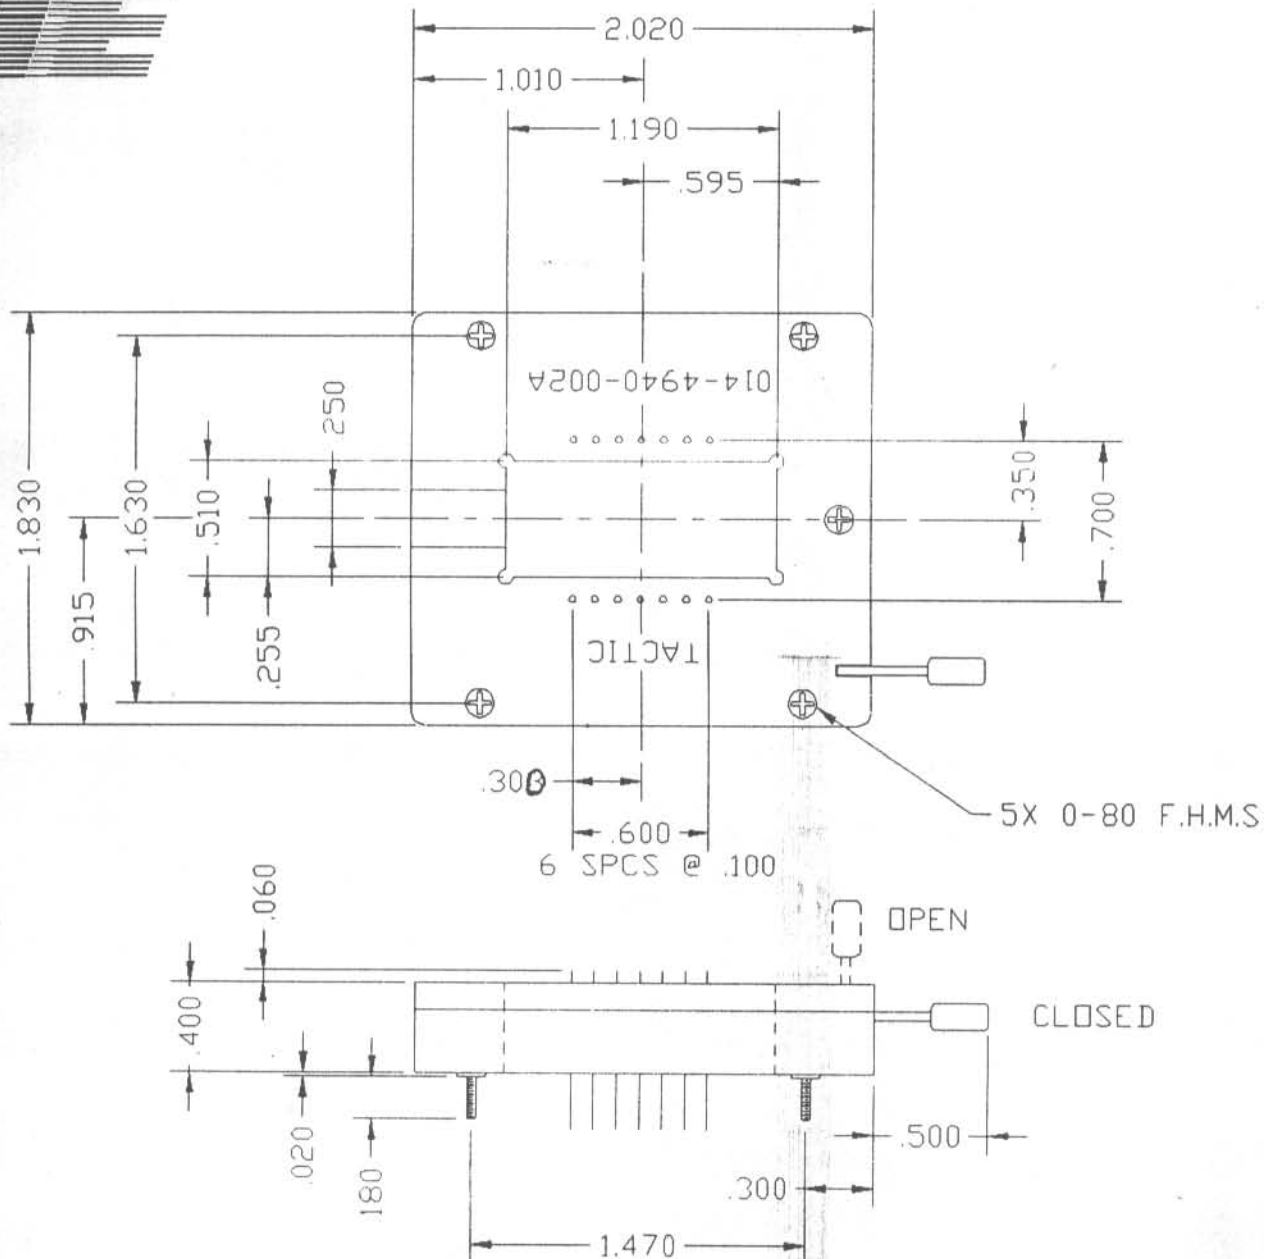

This series is identical to 3540 series with the exception of the overall size.

Maximum working area: 1.3" x 1.1"
Minimum lead length: .125"
Lead size accepted: .004" x .020"

Physical Insulation material: Glass Reinforced; Polysulfone
Flammability: UL 94V-0
Color: Green

Contact (.150" long x .010" x .018")
Material: Beryllium Copper
Plating: 30 μ "(.76 μ m)Gold-MIL-G-45204
Type II, Grade C over 50 μ "(1.3 μ m)
Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local Tactic Distributor for design and pricing.

Phone: 1-800-955-4707