




4940 Series

022-4940-001A

REV. C

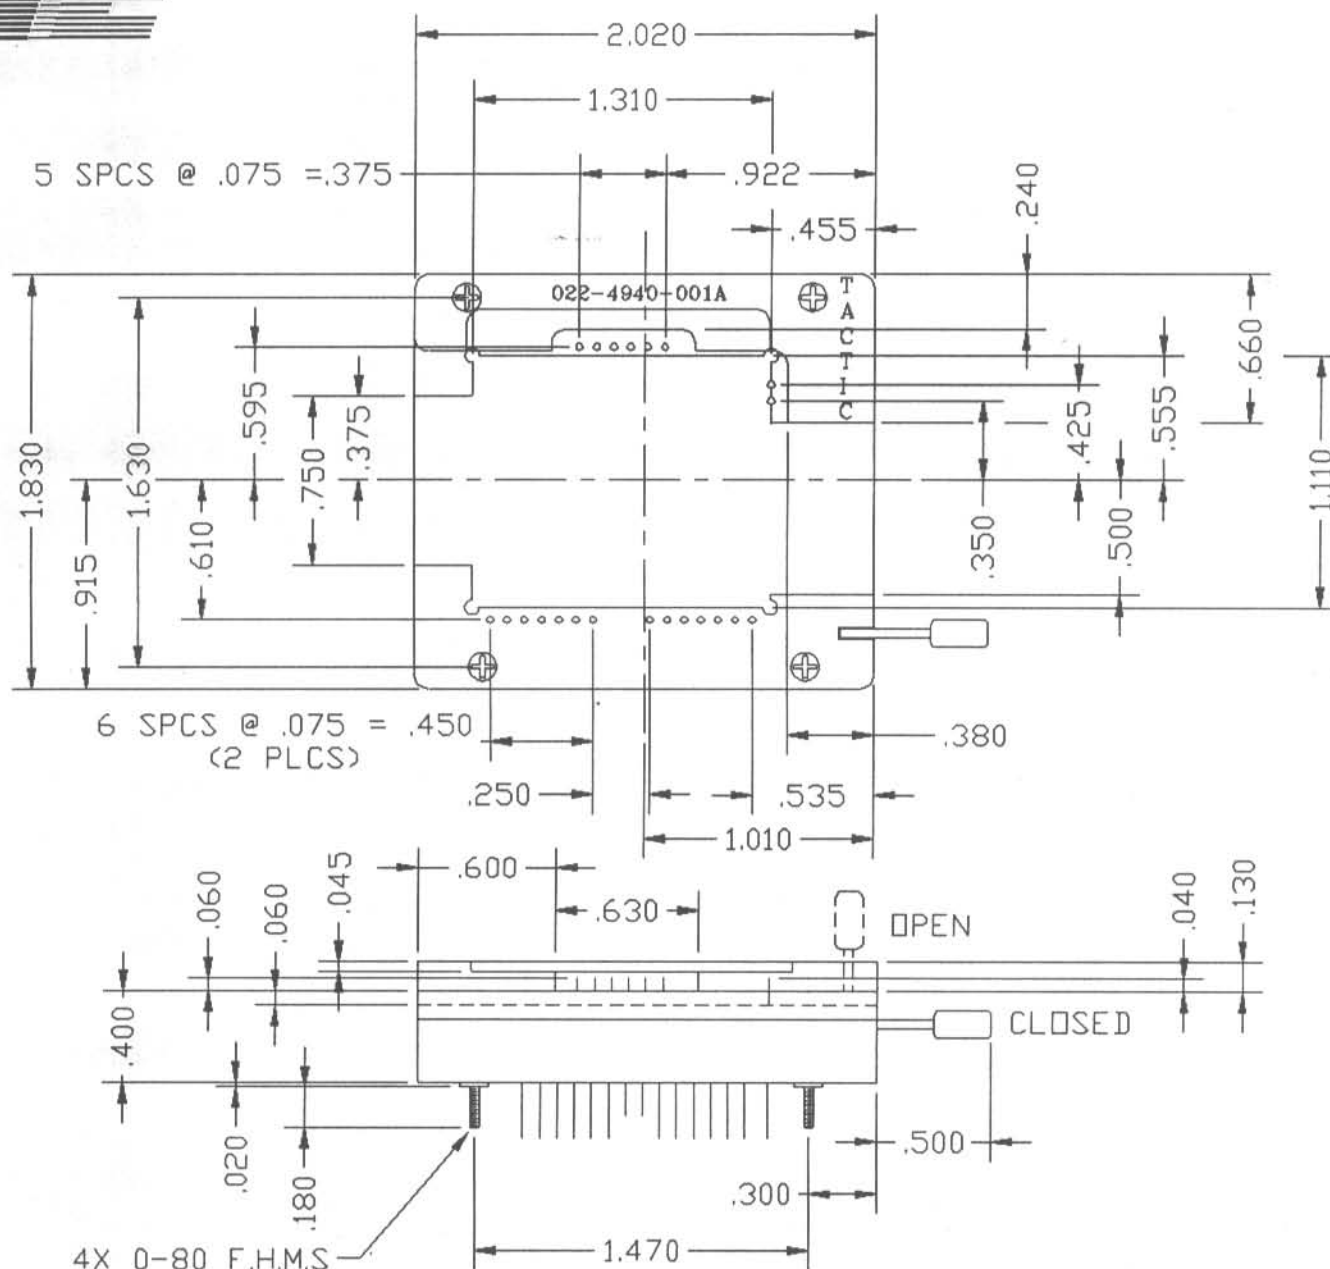

Physical	Insulation material: Glass Reinforced; Polysulfone
	Flammability: UL 94V-0
	Color: Green

Contact (2 @ .170 lg; 6 @ .150" lg;
14 @ .250 lg x .010" x .018")
Material: Beryllium Copper
Plating: 30 μ "(.76 μ m)Gold-MIL-G-45204
Type II,Grade C over 50 μ "(1.3 μ m)
Sulfamate Nickel per QQ-N-290A

Electrical	Current Rating: 1 Amp
	Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
	Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TMC Distributor for design and pricing.

Phone: 1-800-955-4707