




# 4662 SERIES 028-4662-001A

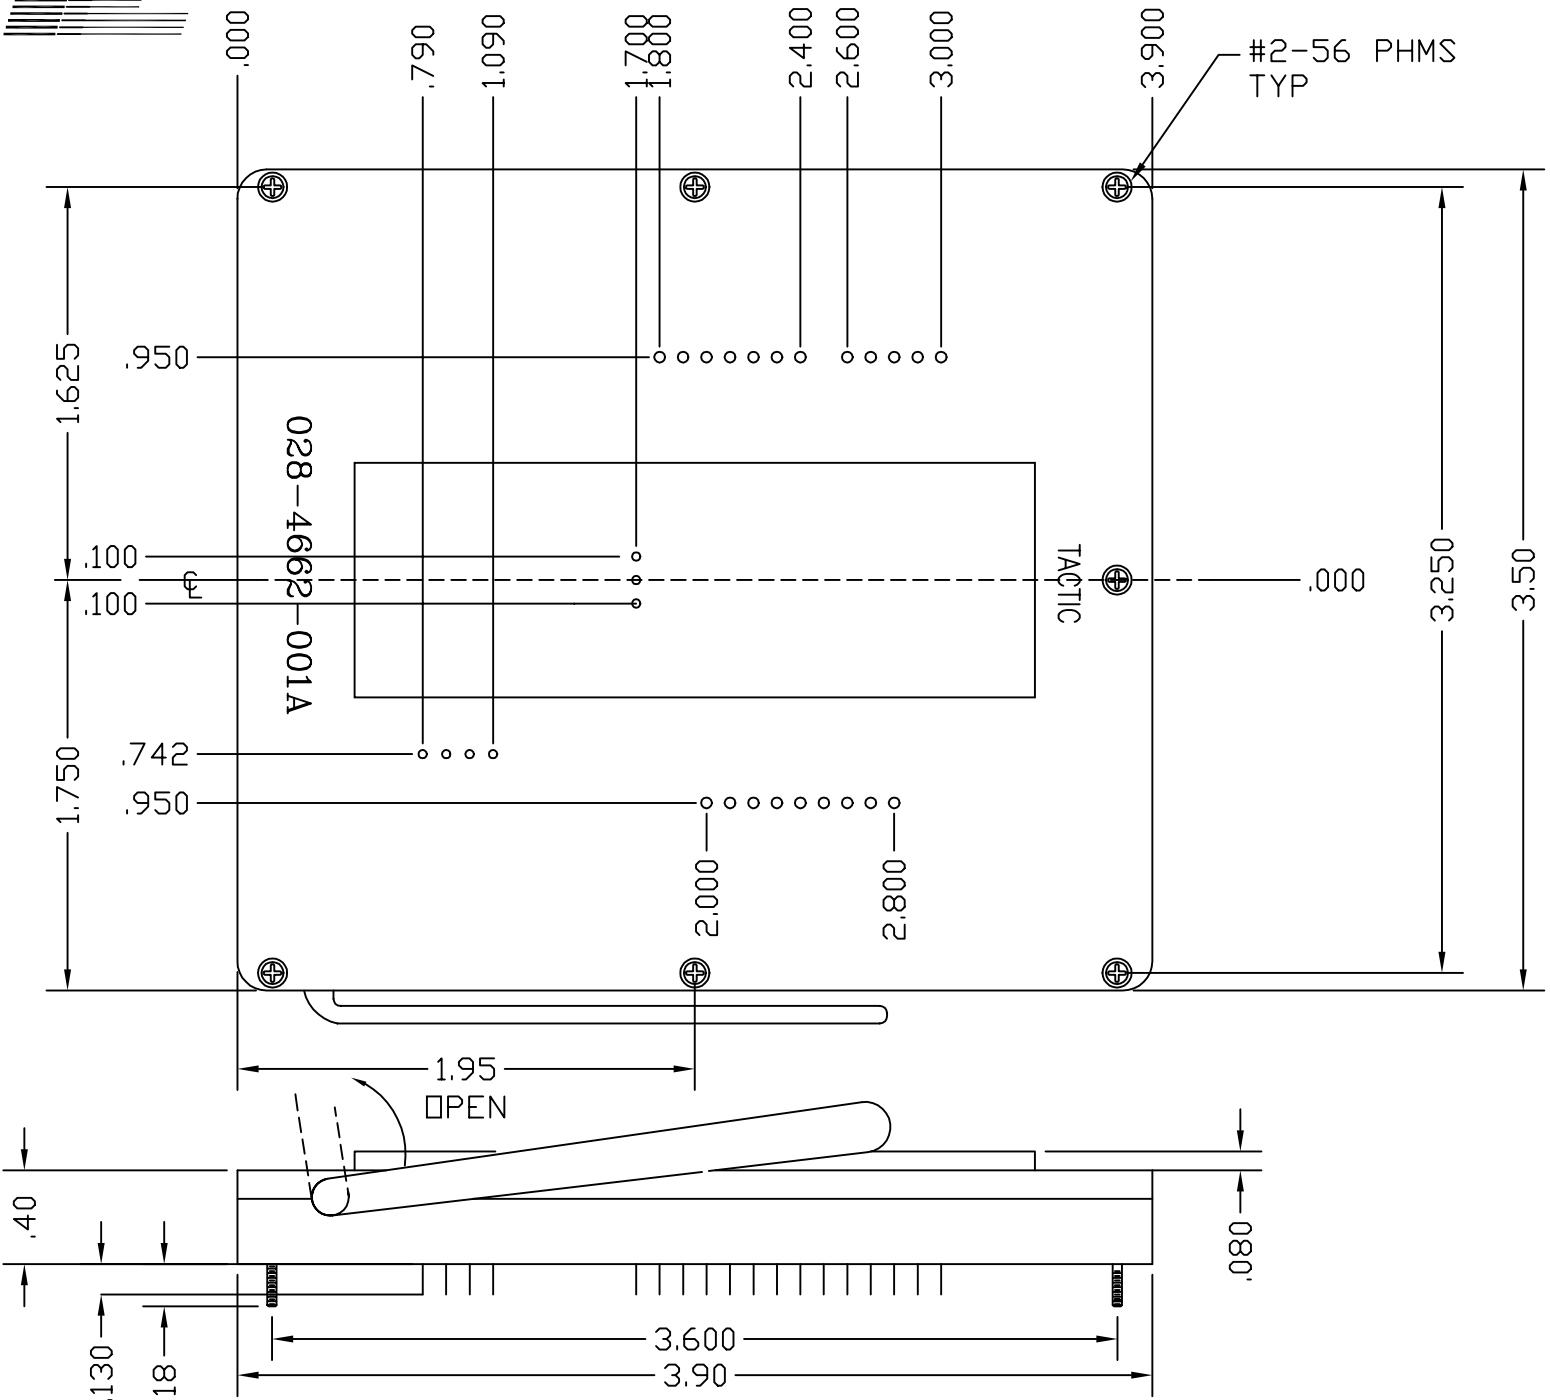

This series is identical to previously mentioned series; size is the only difference.

Max. working area: 2.5" x 2.5"  
Min. lead length: .100"  
Lead size accepted .025 sq. & .025 dia.

**Physical** Insulation material: Glass Reinforced; Polysulfone  
Flammability: UL 94V-0  
Color: Green

Contact (.130" lg x .010" x .028")  
Material: Beryllium Copper  
Plating: 30μ (.76μm) Gold-MIL-G-45204  
Type II, Grade C over 50μ (1.3μm)  
Sulfamate Nickel per QQ-N-290A

**Electrical** Current Rating: 1 Amp  
Insulation Resistance: >1x10<sup>9</sup>Ω at 500Vdc  
Withstanding Voltage: 1000 Vrms at Sea Level

**Environmental** Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707 FAX: 1-972-867-6669