


4662 Series ZIF Socket 030-4662-002A

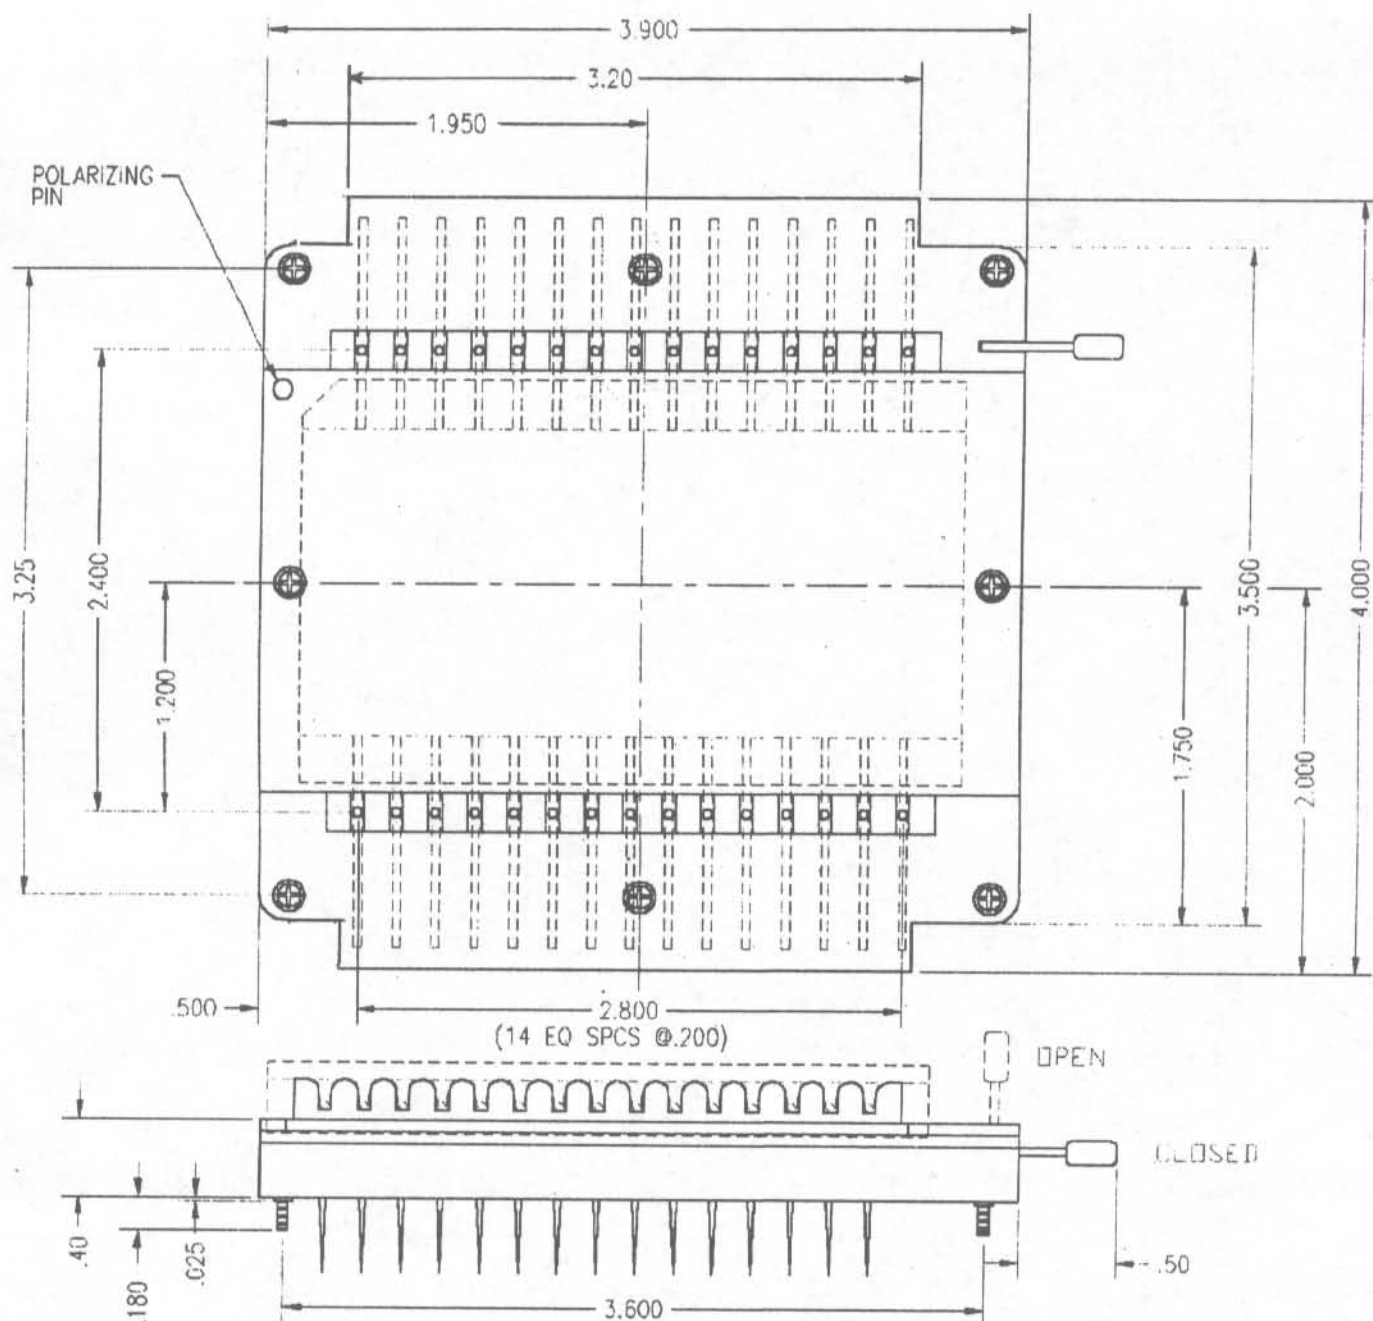

This series is identical to previously mentioned series; Lead size accepted: .040" max size is the only difference.

Physical Insulation material: Glass Reinforced; Polysulfone Flammability: UL 94V-0 Color: Green	Contact (.500" lg x .017" x .045") Material: Beryllium Copper Plating: 30μ (.76μm) Gold-MIL-G-45204 Type II, Grade C over 50μ (1.3μm) Sulfamate Nickel per QQ-N-290A
--	--

Electrical
 Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: $-67^\circ\text{F} (-55^\circ\text{C})$ to $+302^\circ\text{F} (+150^\circ\text{C})$

Consult factory or your local TMC Distributor for design and pricing.
 Phone: 1-800-955-4707