


4940 Series

031-4940-002A

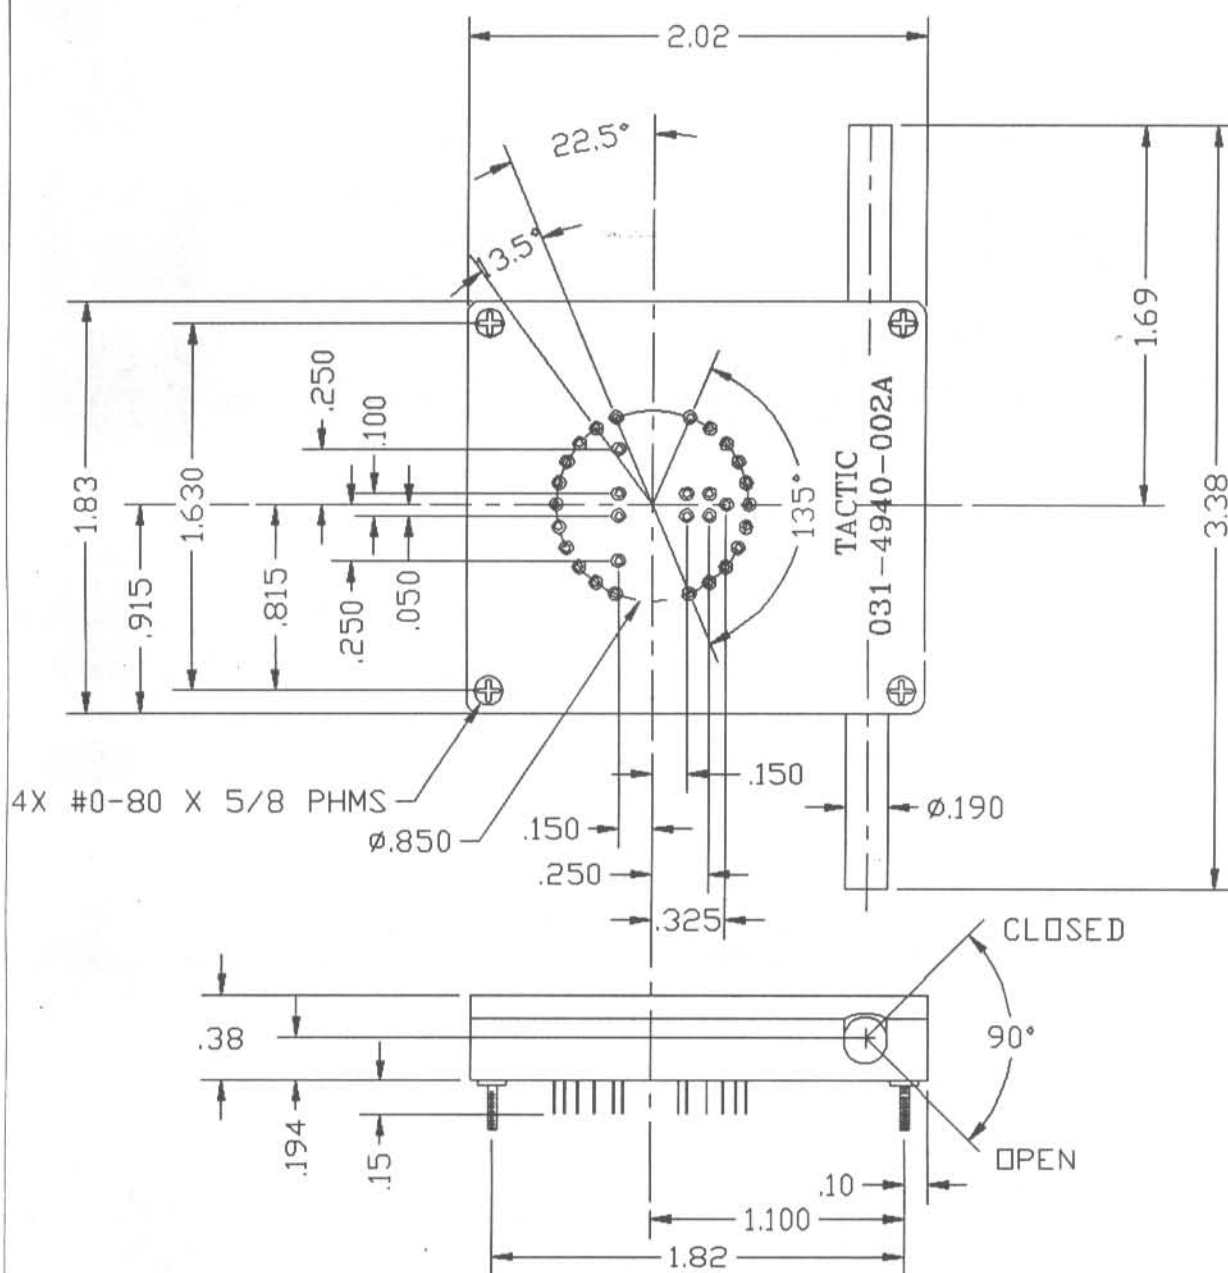

Physical	Insulation material: Glass Reinforced; Polysulfone
	Flammability: UL 94V-0
	Color: Green

Contact (.150" lg x .012" x .028")
Material: Beryllium Copper
Plating: 30 μ "(.76 μ m)Gold-MIL-G-45204
Type II, Grade C over 50 μ "(1.3 μ m)
Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TMC Distributor for design and pricing.

Phone: 1-800-955-4707