




4662 Series 040-4662-001A

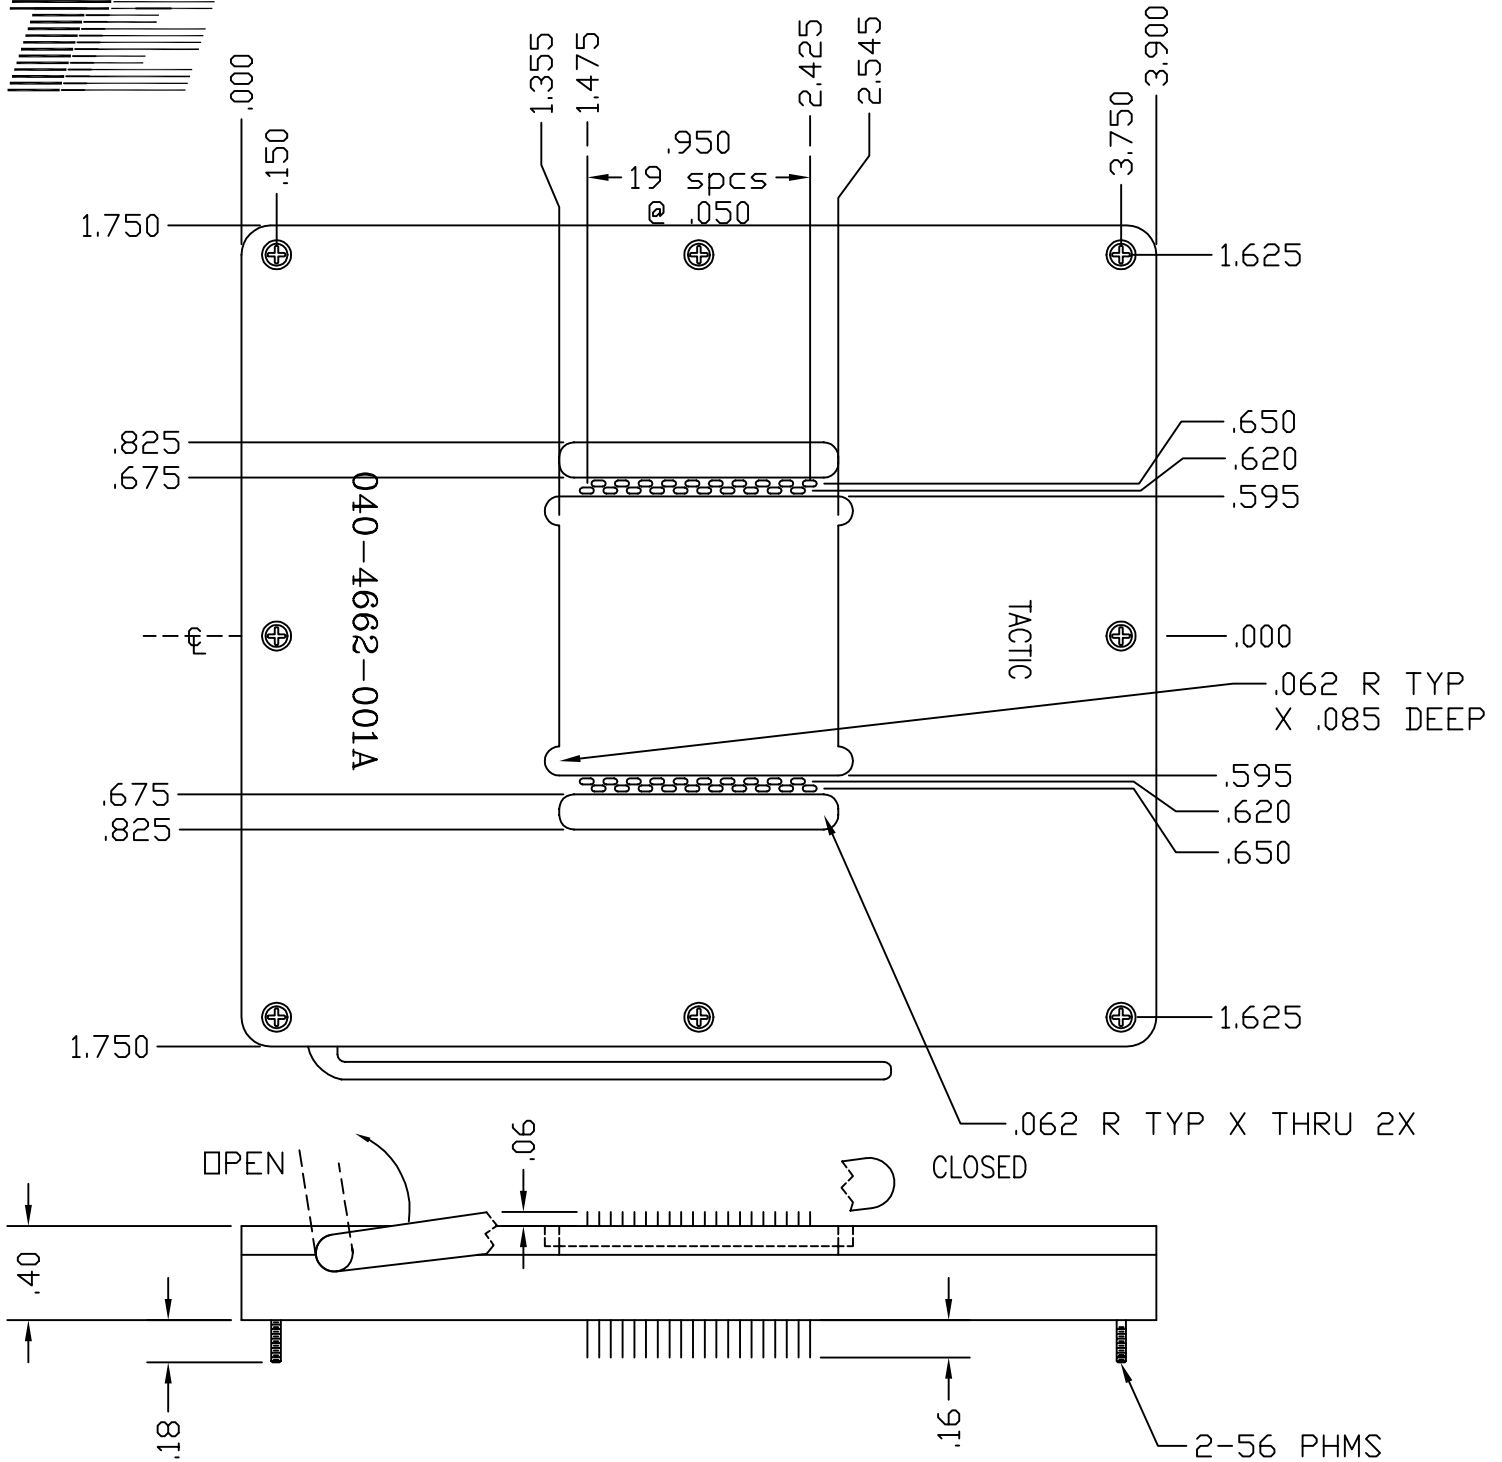

<p>Max. working area: 2.5" x 2.5" Lead length: .090" Lead size accepted: .015 wide</p>	
<p>Physical Insulation material: Glass Reinforced; Polysulfone Flammability: UL 94V-0 Color: Green</p>	<p>Contact tail (.16" lg x .010" x .018") Material: Beryllium Copper Plating: 30μ (.76μm) Gold-MIL-G-45204 Type II, Grade C over 50μ (1.3μm) Sulfamate Nickel per QQ-N-290A</p>
<p>Electrical Current Rating: 1 Amp Insulation Resistance: >1x10⁹Ω at 500Vdc Withstanding Voltage: 1000 Vrms at Sea Level</p>	
<p>Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C) Consult factory or your local TACTIC Distributor for design and pricing. Phone: 1-800-955-4707 FAX: 1-972-867-6669</p>	