4662 Series ZIF Socket 048-4662-003B

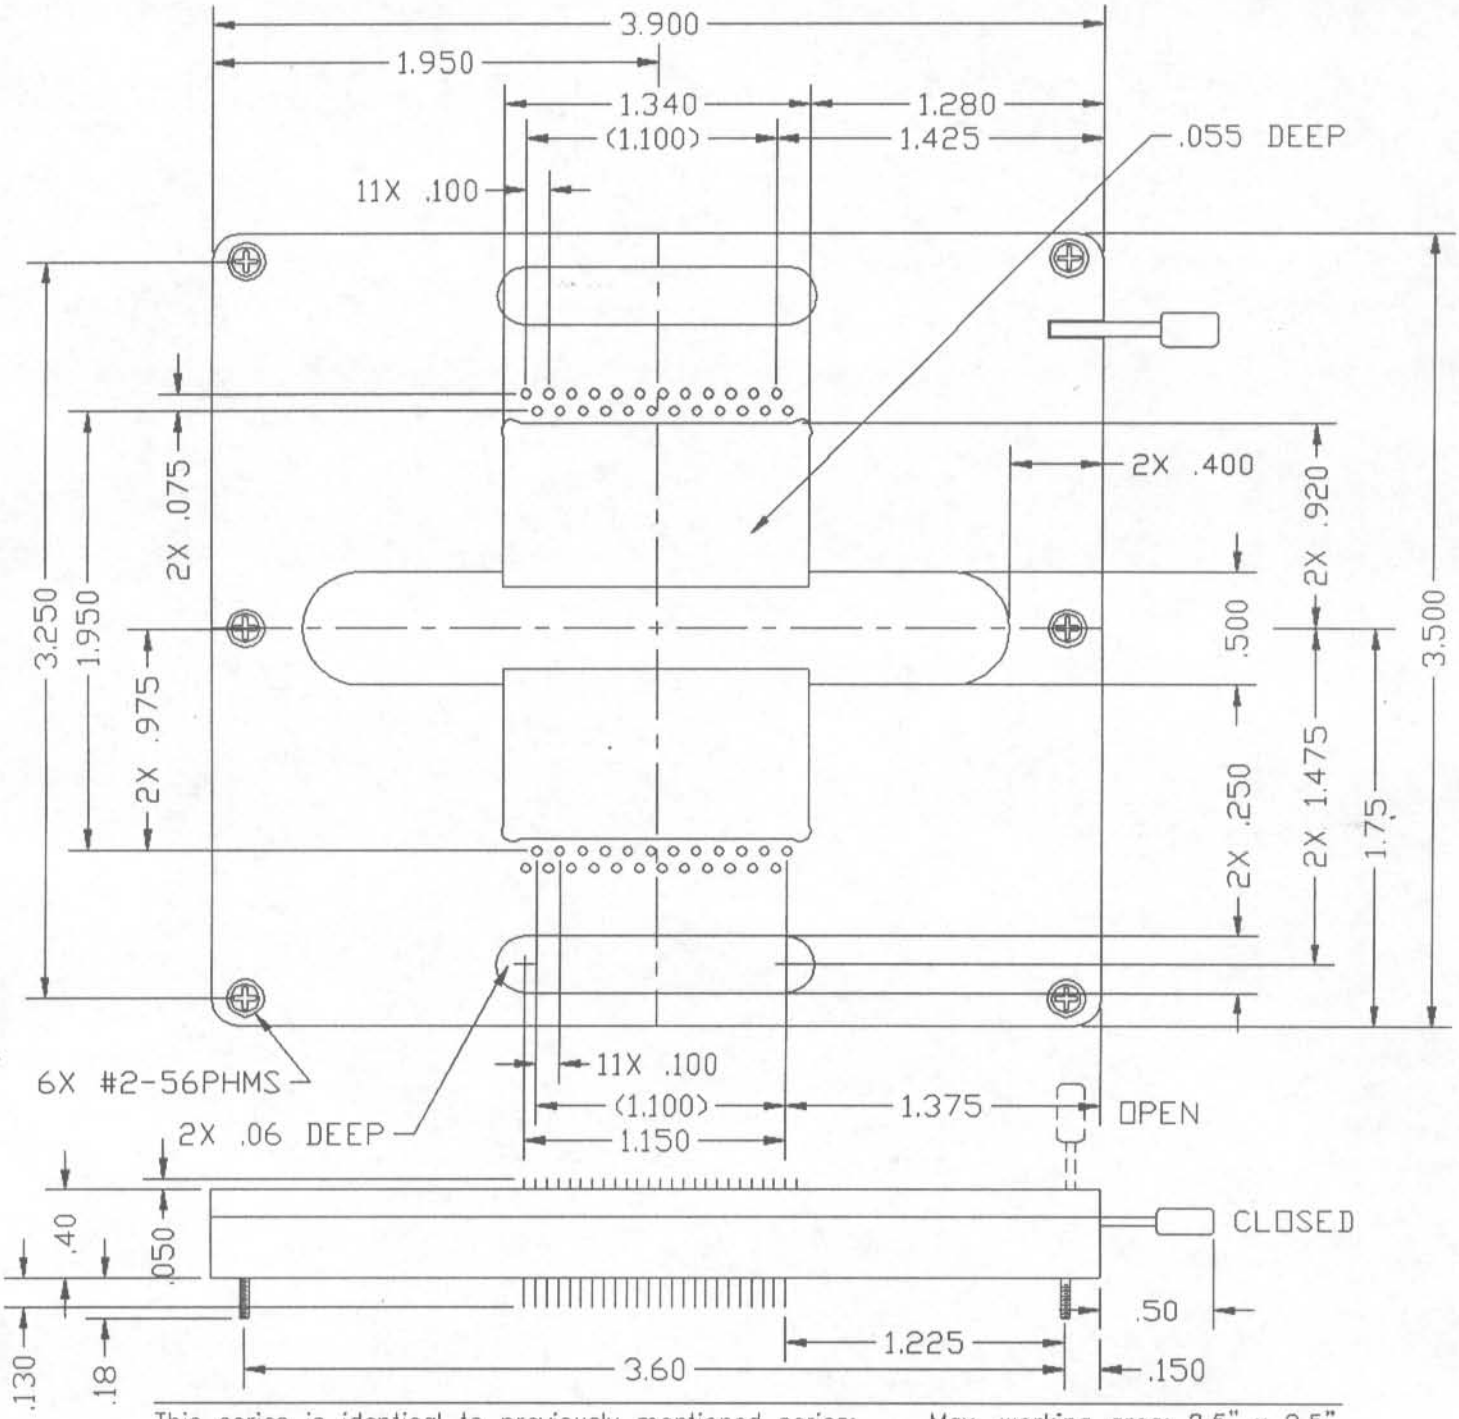

This series is identical to previously mentioned series; size is the only difference.

Max. working area: 2.5" x 2.5"
Min. lead length: .100"
Lead size accepted: .012"-.018"

Physical

Insulation material: Glass Reinforced; Polysulfone
Flammability: UL 94V-0
Color: Green

Contact (.130" lg x .010" x .018")
Material: Beryllium Copper
Plating: 30μ"(.76μm)Gold-MIL-G-45204 Type II,Grade C over 50μ"(1.3μm) Sulfamate Nickel per QQ-N-290A

Electrical

Current Rating: 1 Amp
Insulation Resistance: >1x10⁹Ω at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)