



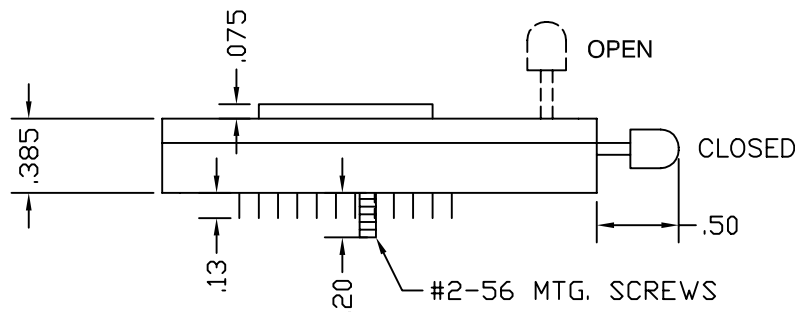

3540 Series

052-3540-001A

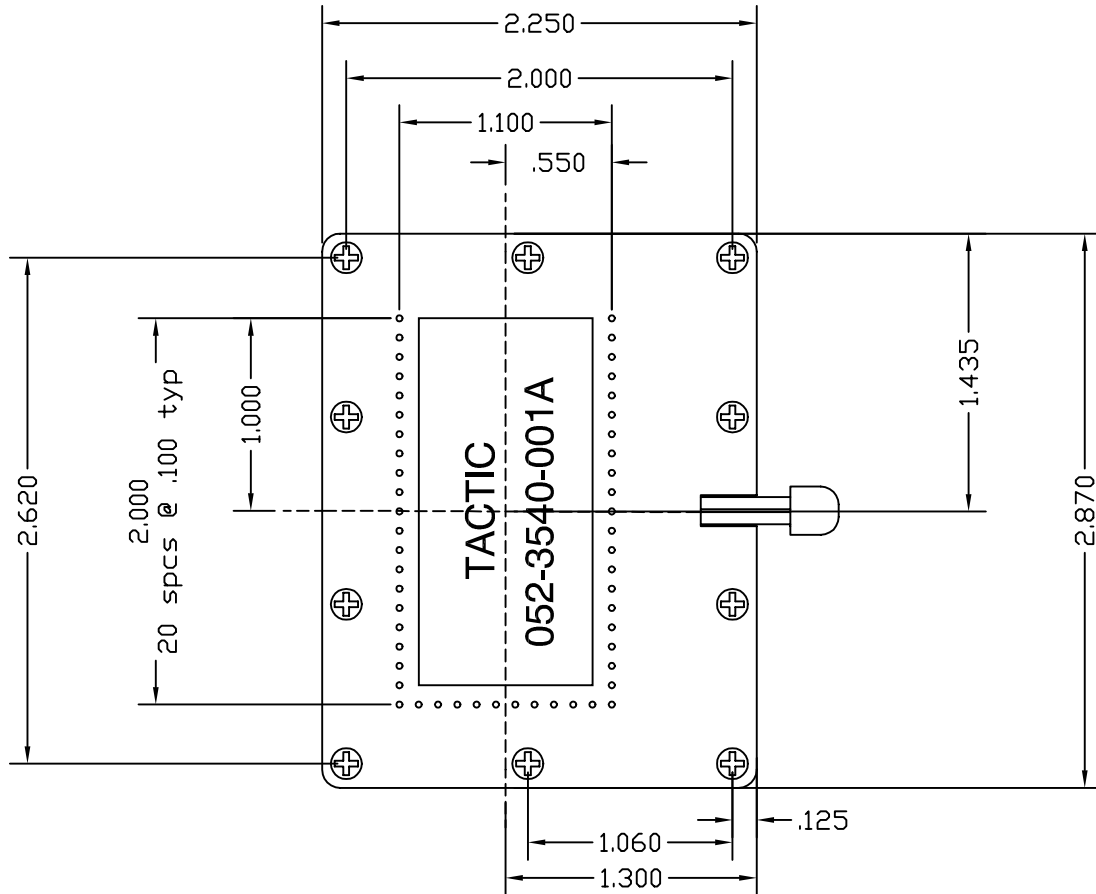

Physical	Insulation material: Glass Reinforced Polysulfone Flammability: UL 94V-O Color: Green	Contact Tail (.010" x .028" x .13 lg) Material: Beryllium Copper Plating: 30μ"(76μm)Gold-MIL-G-45204 Type II,Grade C over 50μ"(1.3μm) Sulfamate Nickel per QQ-N-290A
Electrical	Current Rating: 1 Amp Insulation Resistance: >1x10 ⁹ Ω at 500Vdc Withstanding Voltage: 1000 Vrms at Sea Level	Lead length: .190" Lead size accepted: x .018"ø
Environmental	Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)	

Consult factory or your local TACTIC Distributor for design and pricing.
Phone: 1-800-955-4707 FAX: 1-972-867-6669