


4680 Series

052-4680-002A

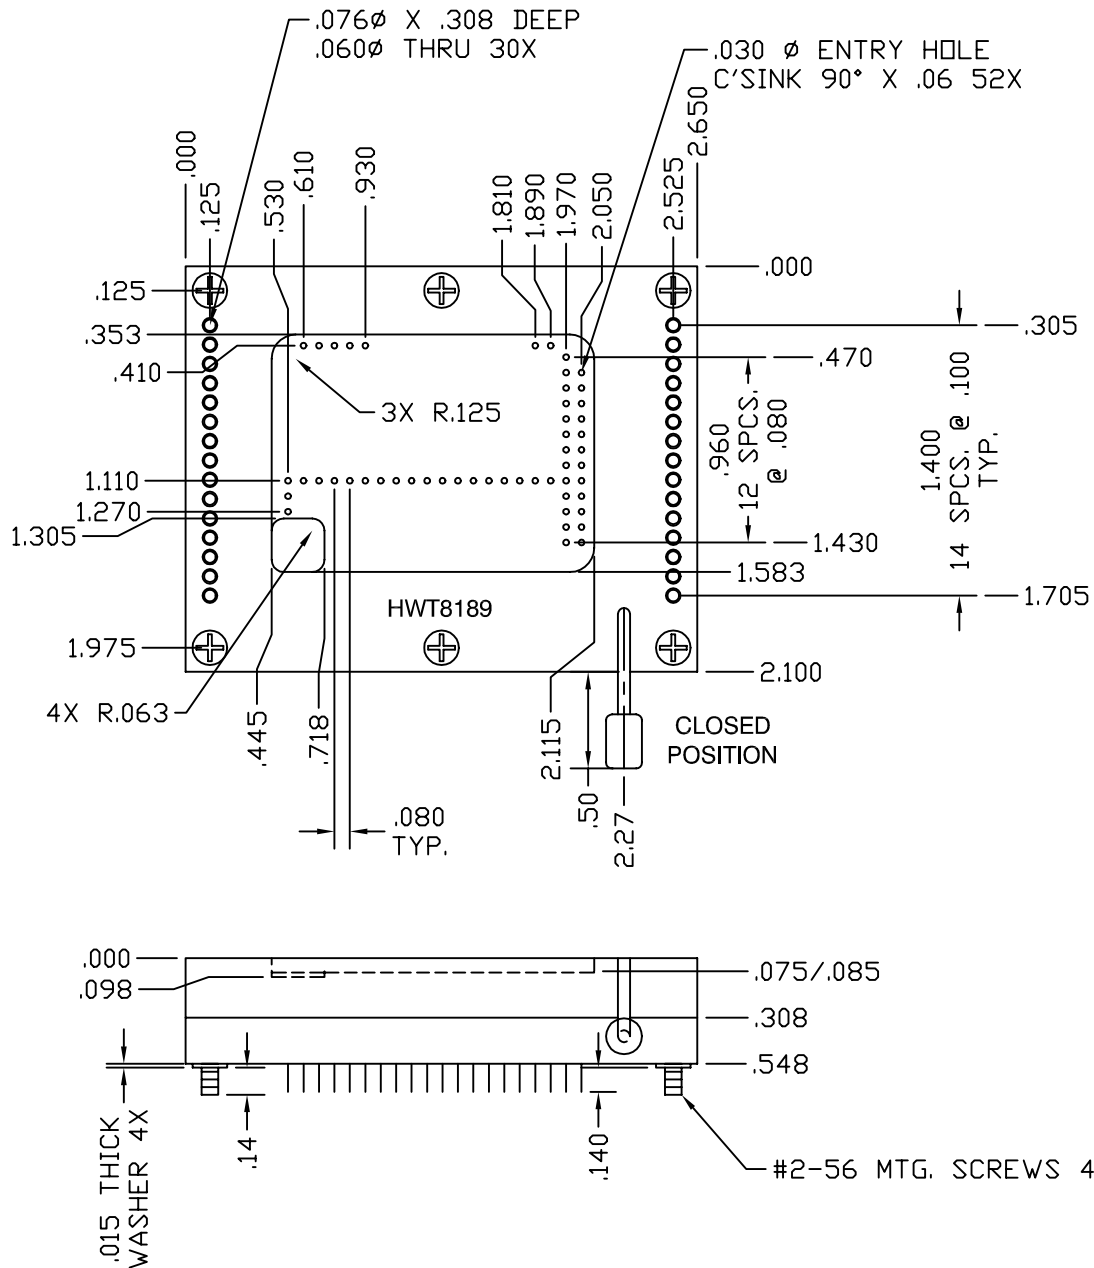

Physical

Insulation material: Glass Filled Ultem
Flammability: UL 94V-O
Color: Tan

Contact Tail (.010" x .018" x .135 lg)
Material: Beryllium Copper
Plating: 30 μ "(.76 μ m)Gold-MIL-G-45204
Type II, Grade C over 50 μ "(1.3 μ m)
Sulfamate Nickel per QQ-N-290A

Electrical

Current Rating: 1 Amp
Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating Operational: -67°F(-55°C) to +300°F(+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.
Phone: 1-800-955-4707 FAX: 1-972-867-6669