


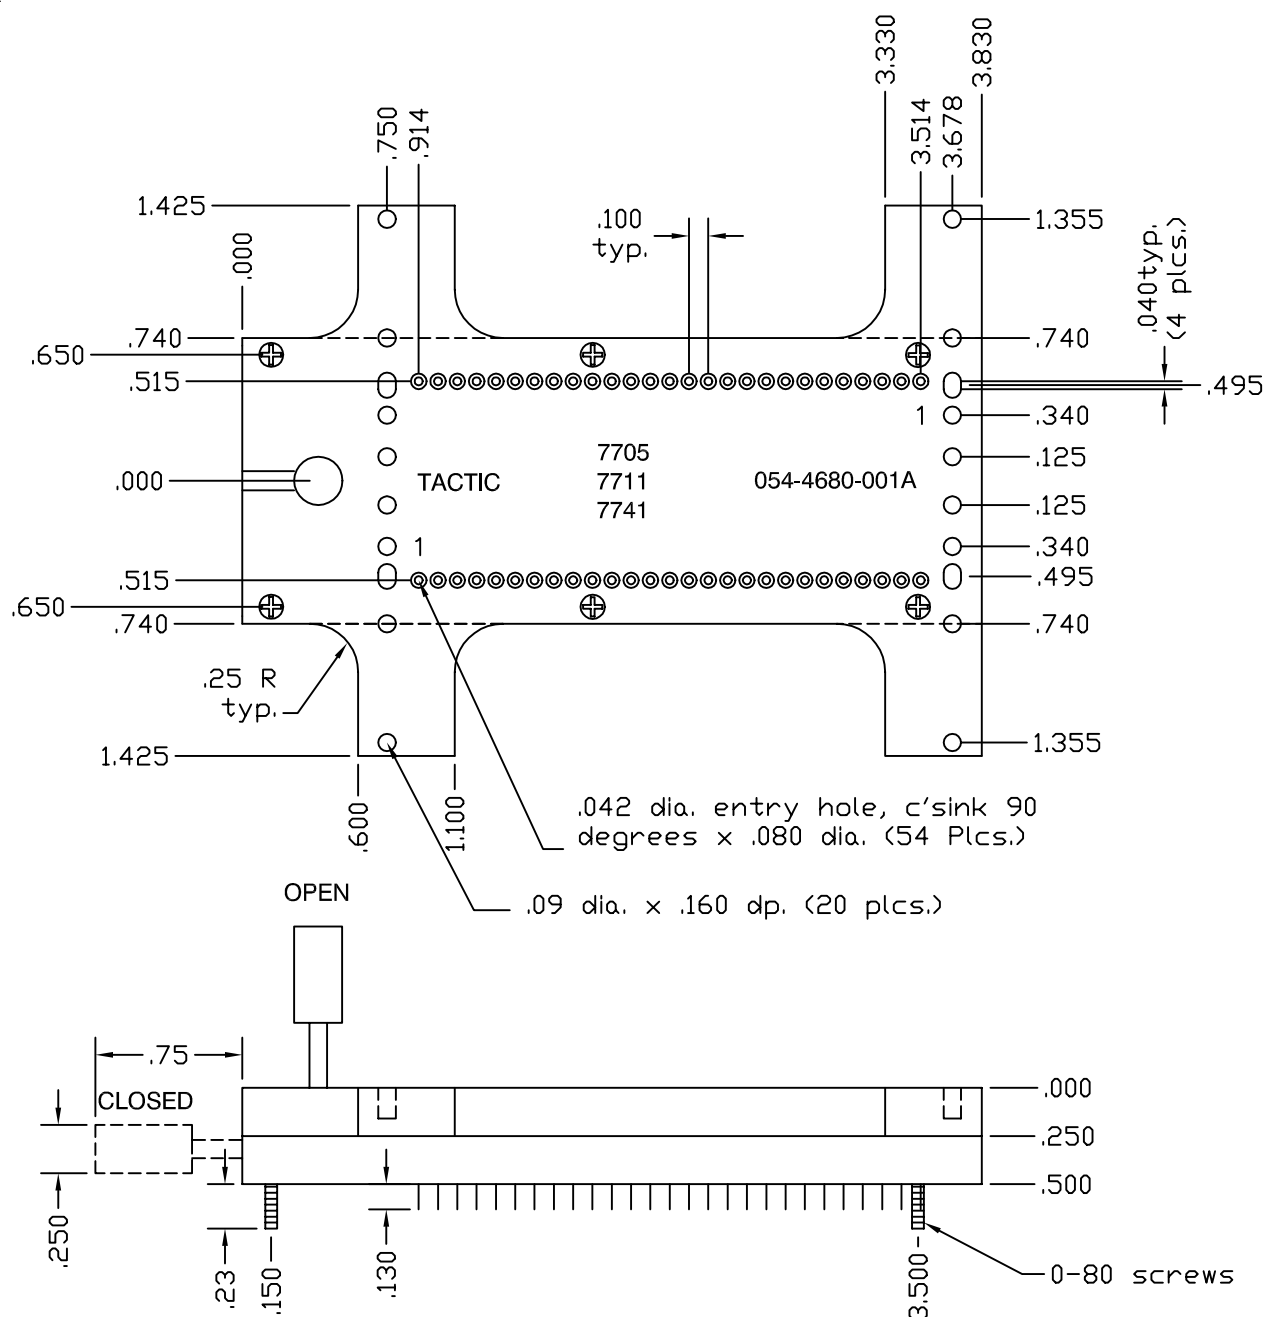

4680 Series

054-4680-001A

**Physical**

Insulation material: Acetron  
 Flammability: UL 94V-0  
 Color: Black

Contact Tail (010" x .028" x .130 lg)  
 Material: Beryllium Copper  
 Plating: 30 $\mu$ "(.76 $\mu$ m)Gold-MIL-G-45204  
 Type II, Grade C over 50 $\mu$ "(1.3 $\mu$ m)  
 Sulfamate Nickel per QQ-N-290A

**Electrical**

Current Rating: 1 Amp  
 Insulation Resistance: >1x10<sup>9</sup> $\Omega$  at 500Vdc  
 Withstanding Voltage: 1000 Vrms at Sea Level

**Environmental**

Temperature Rating Operational: -67°F(-55°C) to +185°F(+85°C)

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707

FAX: 1-972-867-6669