



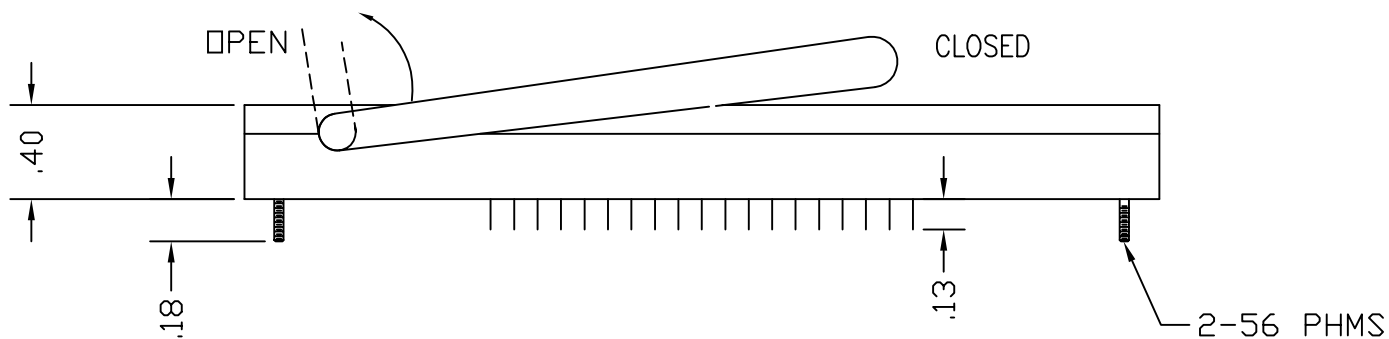

4662 Series 057-4662-001A

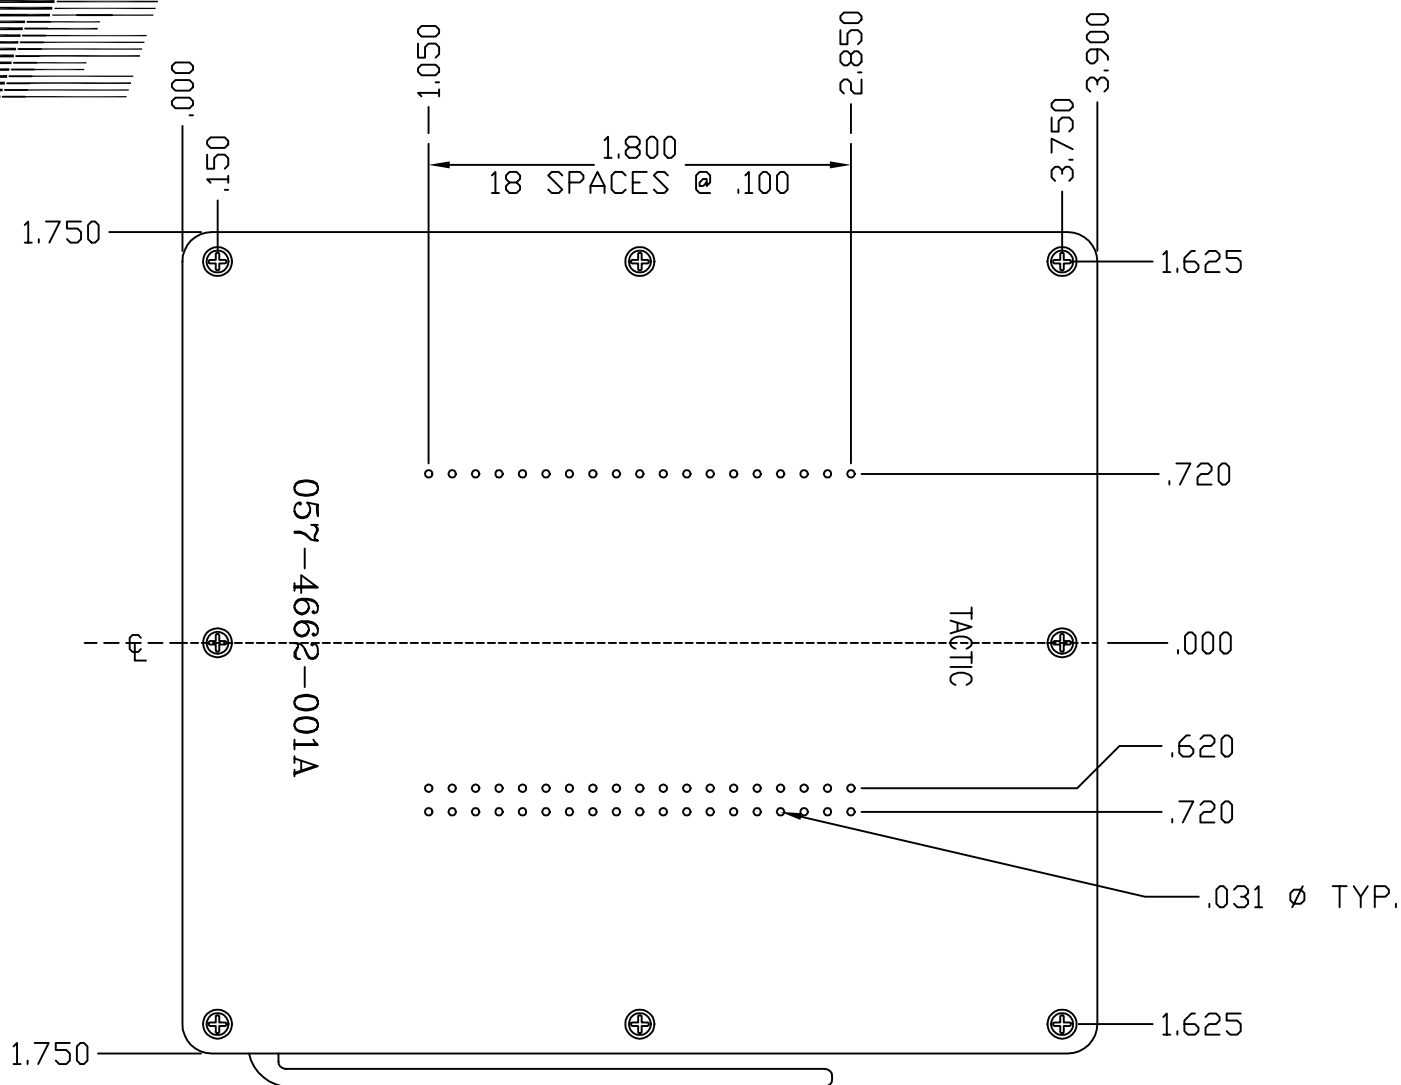

Max. working area: 2.5" x 2.5"
Lead length: .090" min. - .130" max
Lead size accepted: .018"Ø

Physical Insulation material: Glass Reinforced; Polysulfone
Flammability: UL 94V-0
Color: Green

Contact tail (.13" lg x .010" x .028")
Material: Beryllium Copper
Plating: 30µ"(.76µm)Gold-MIL-G-45204
Type II, Grade C over 50µ"(1.3µm)
Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
Insulation Resistance: >1x10⁹Ω at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707 FAX: 1-972-867-6669