




4662 Series

068-4662-002A

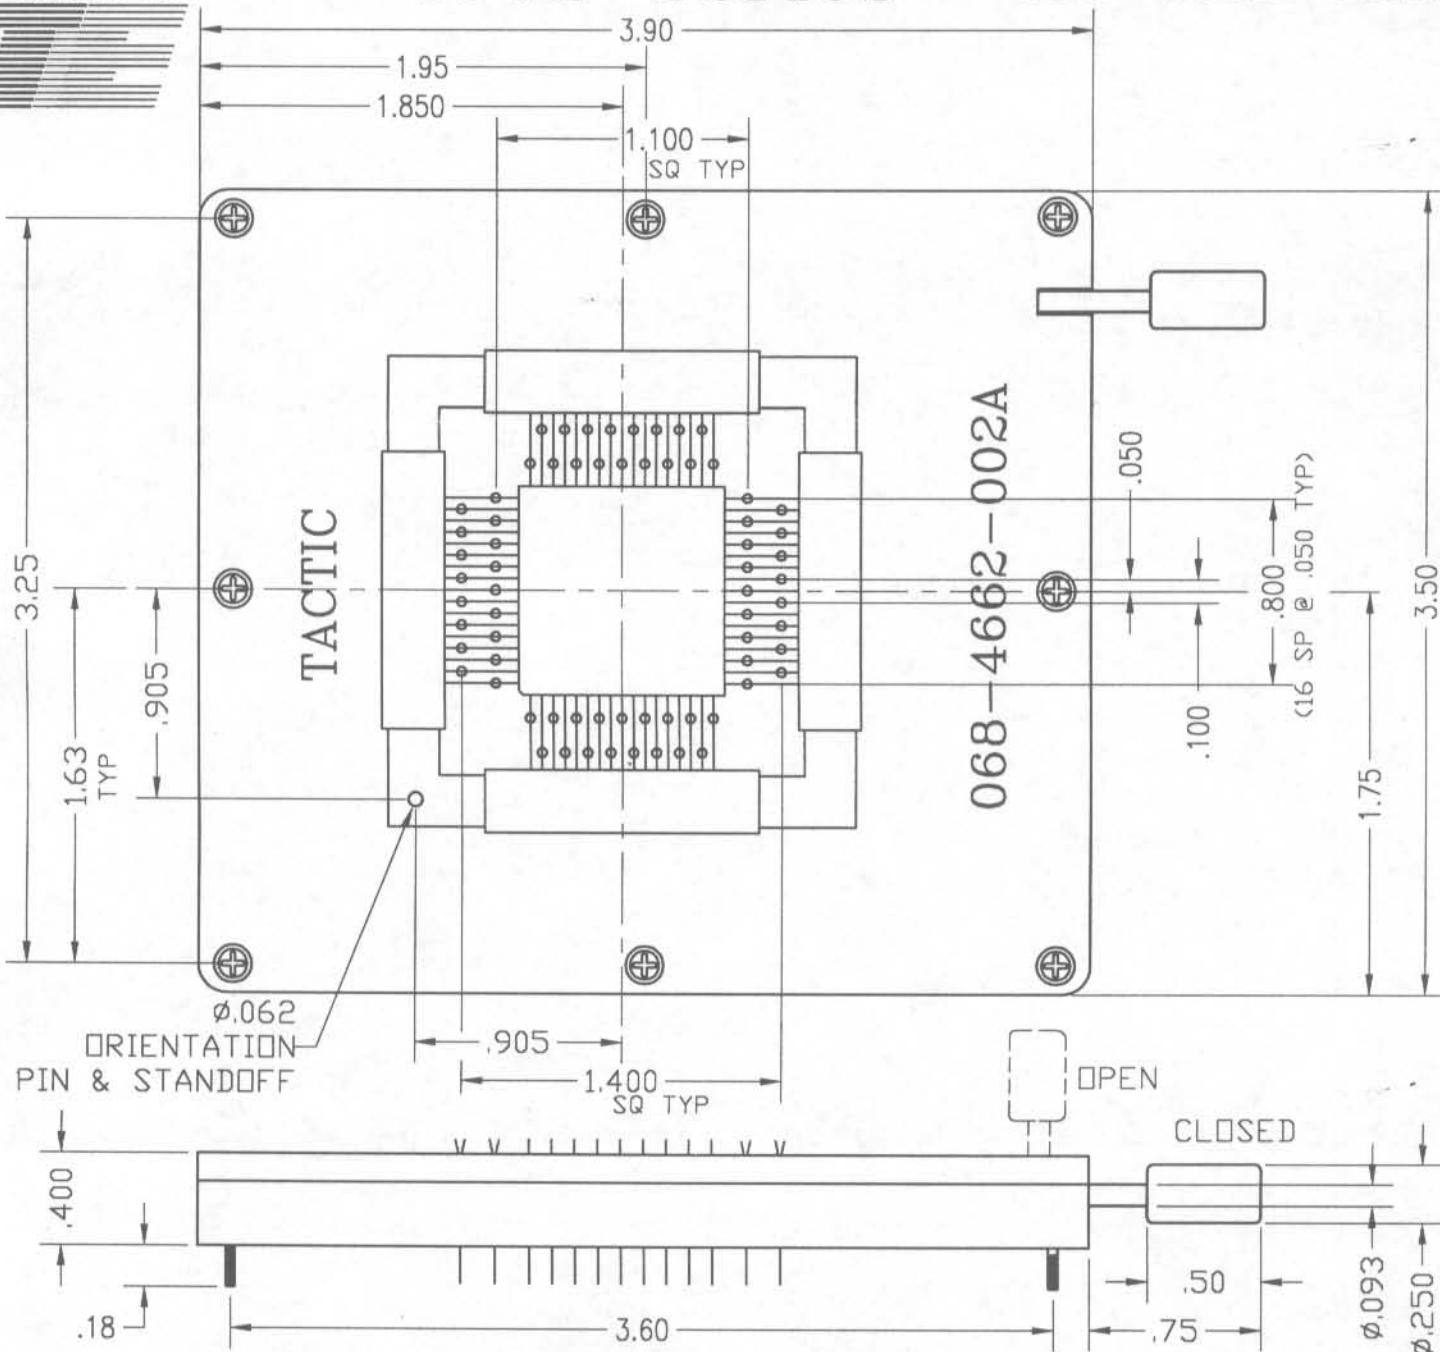

This series is designed for any number of pinned packages with 1,2,3 or 4 sides, and in-line, square or round patterns.

Max. working area: 2.5" x 2.5"
Min. lead length: .100"
Lead size accepted: .008"—.015"

Physical

al Insulation
material: Glass Reinforced; Polysulfone
Flammability: UL 94V-0
Color: Green

Contact (.175" lg x .014" x .028")
Material: Beryllium Copper
Plating: 30 μ (.76 μ m) Gold—MIL-G-45204
Type II, Grade C over 50 μ (1.3 μ m)
Sulfamate Nickel per QQ-N-290A

Electrical

cal Current Rating: 1 Amp
Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TMC Distributor for design and pricing.
Phone: 1-800-955-4707