


4680 Series

072-4680-002A

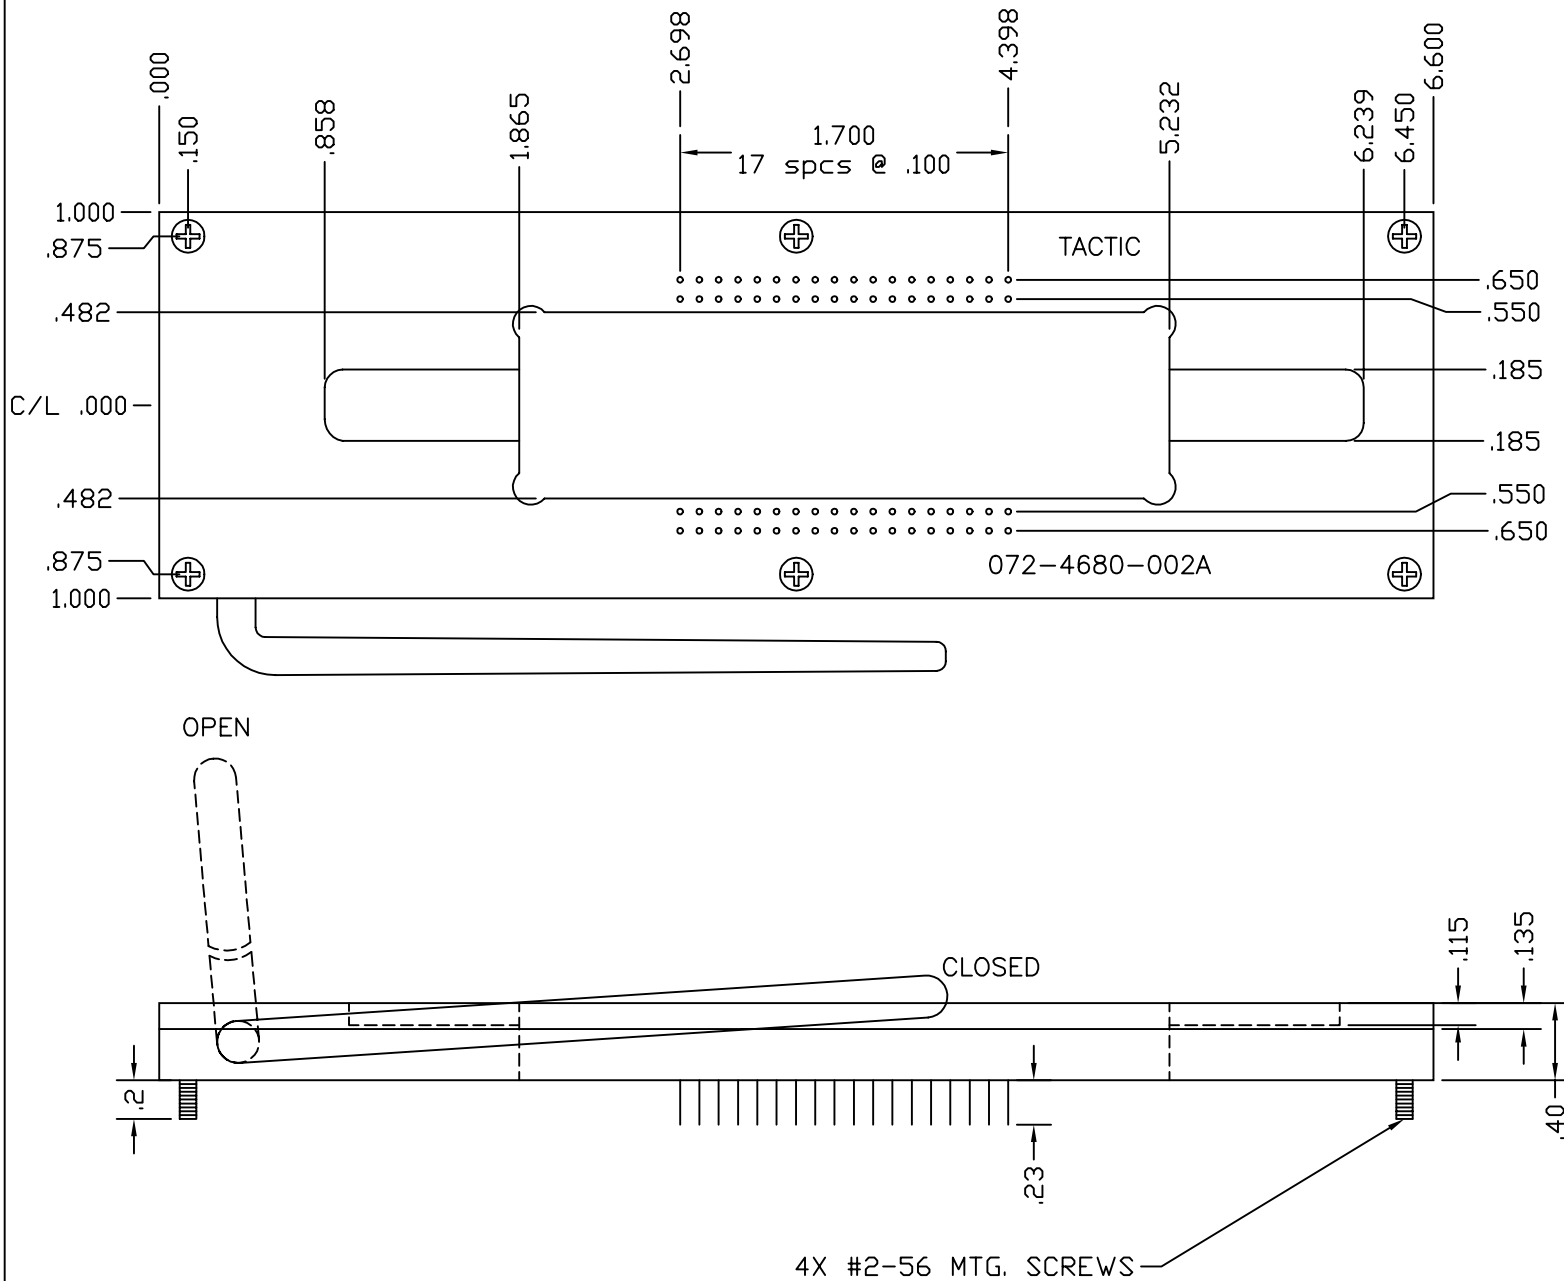

Physical Insulation
 material: Glass Filled: Ultem
 Flammability: UL 94V-0
 Color: Tan

Contact Tail: (.010" x .018" x .23 lg)
 Material: Beryllium Copper
 Plating: 30 μ "(.76 μ m)Gold-MIL-G-45204
 Type II, Grade C over 50 μ "(1.3 μ m)
 Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
 Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +300°F(+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.
 Phone: 1-800-955-4707 FAX: 1-972-867-6669