




4940 Series 091-4940-001A

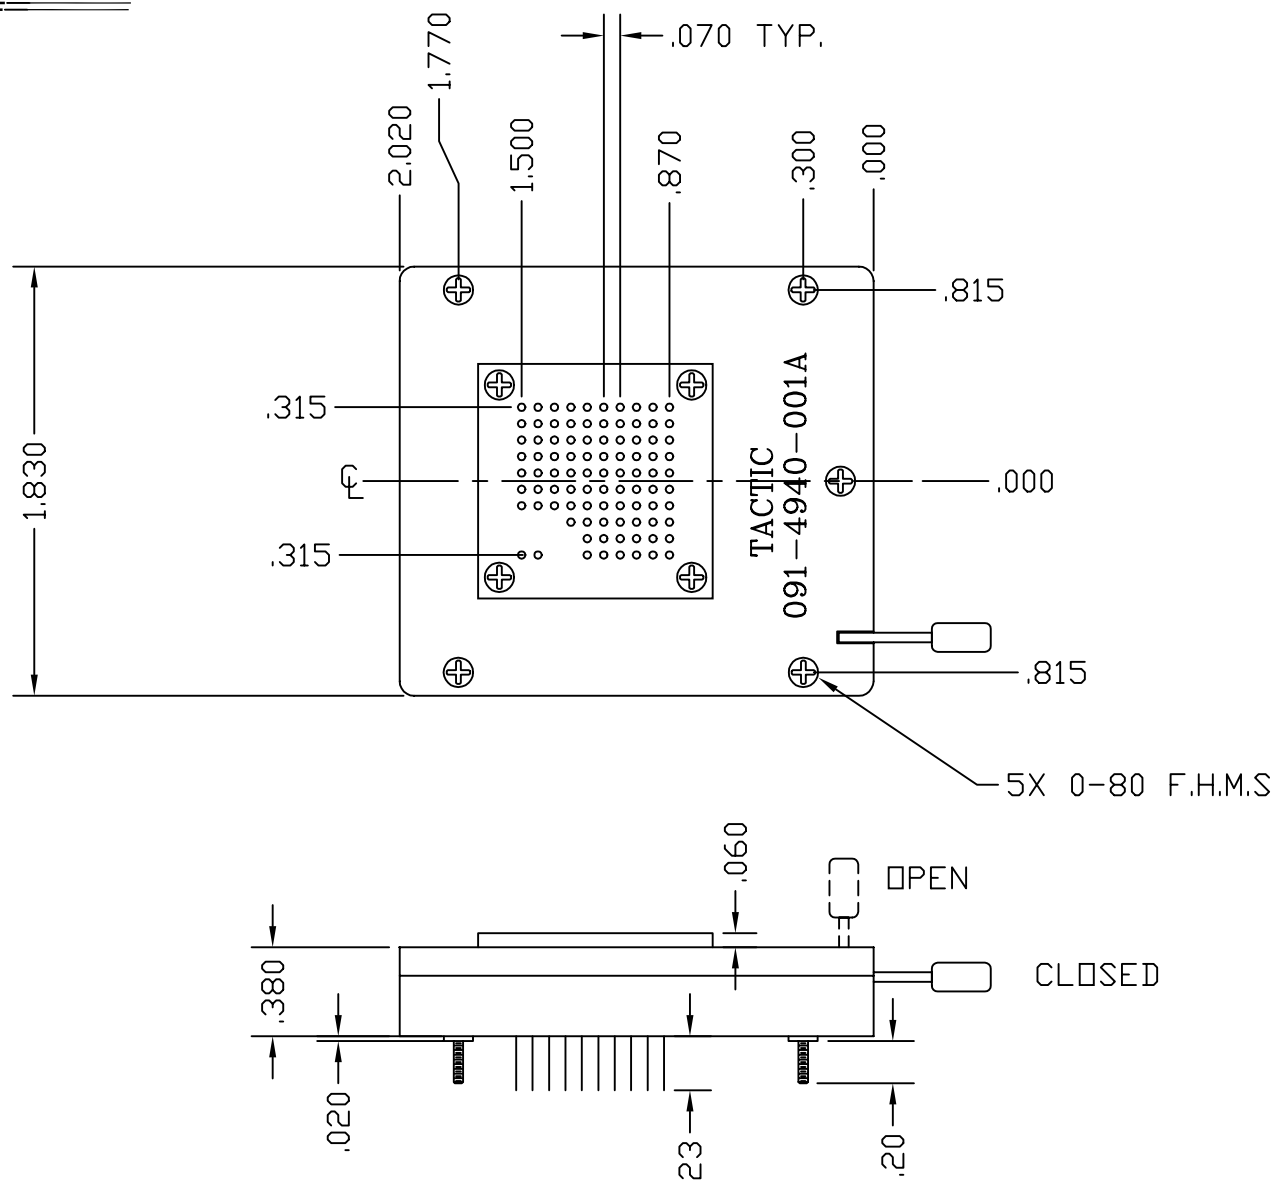

Physical Insulation
 material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-0
 Color: Green

Contact: .23 lg x .010" x .018"
 Lead length: .180"
 Lead size accepted: .018"Ø
 Material: Beryllium Copper
 Plating: 30µ"(.76µm)Gold-MIL-G-45204
 Type II, Grade C over 50µ" 1.3µm)
 Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
 Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)
 Consult factory or your local TMC Distributor for design and pricing.
 Phone: 1-800-955-4707 FAX: 1-972-867-6669