



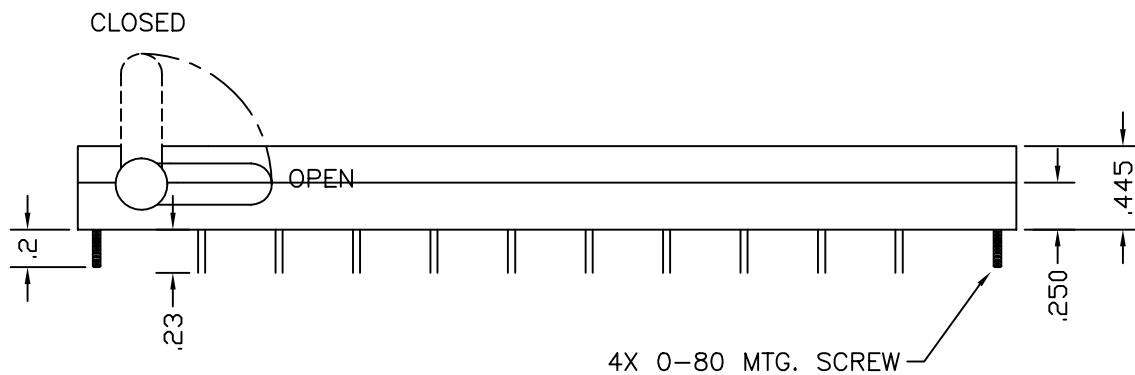

3538 Series

100-3538-006A

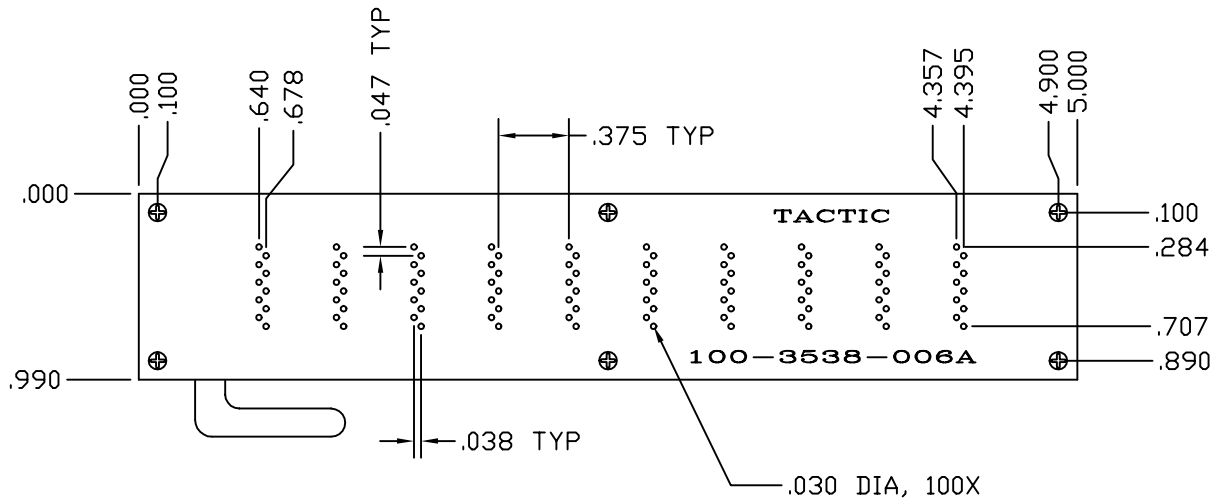

This series is designed for long in-line packages that are wider than two rows, with either square or staggered device lead patterns.

Max. working area: .50" x 4.0"
Lead length: .154" - .194"
Lead size accepted: .015 dia.

Physical Insulation

material: Glass Reinforced; Polysulfone
Flammability: UL 94V-0
Color: Green

Contact Tail (.23" lg x .010" x .018")
Material: Beryllium Copper
Plating: 30μ"(.76μm)Gold-MIL-G-45204
Type II,Grade C over 50μ"(1.3μm)
Sulfamate Nickel per QQ-N-290A

Electrical

Cal Current Rating: 1 Amp Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc Withstanding Voltage: 1000 Vrms at Sea Level
--

Environmental

Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.
Phone: 1-800-955-4707 FAX: 1-972-867-6669