




4662 Series 104-4662-001A

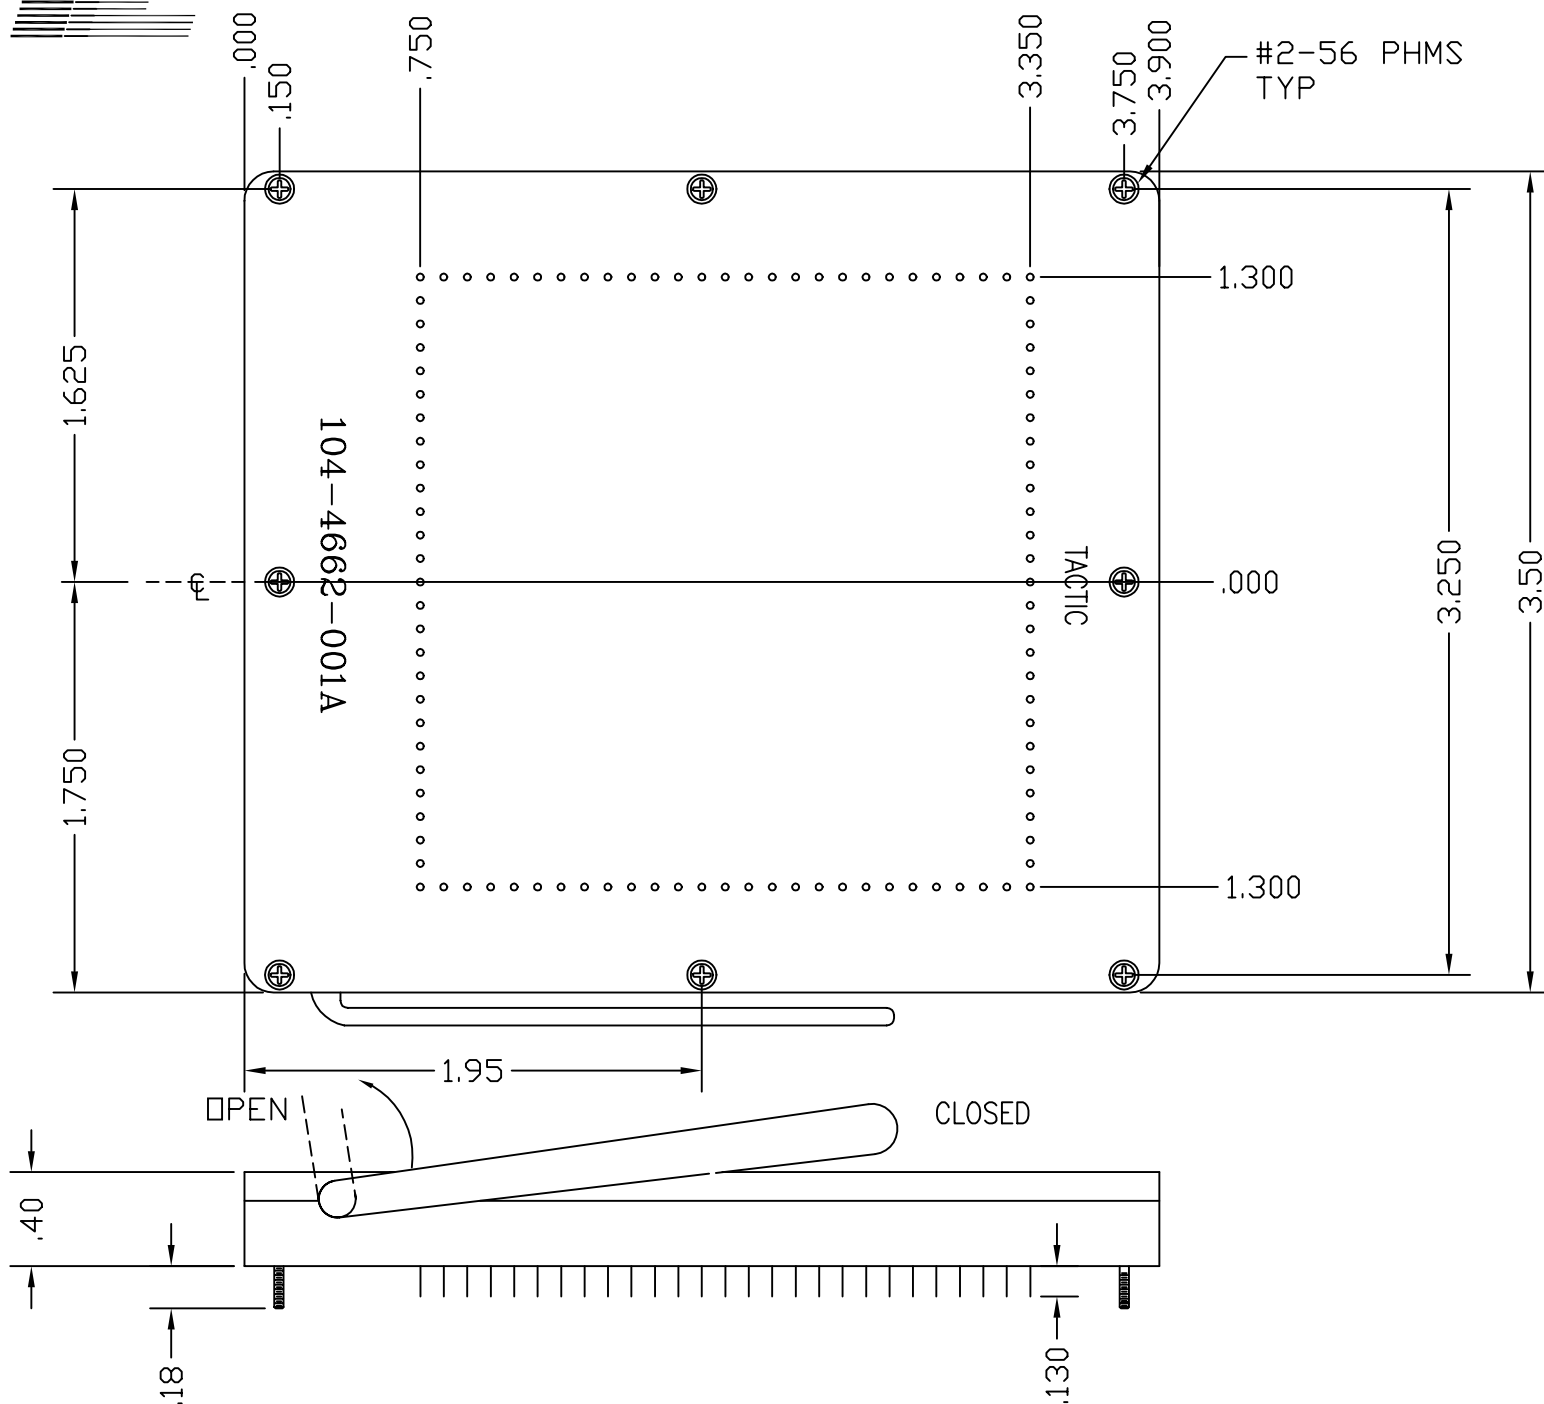

Physical Insulation material: Glass Reinforced; Polysulfone
Flammability: UL 94V-0
Color: Green

Electrical Current Rating: 1 Amp
Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: $-67^\circ\text{F}(-55^\circ\text{C})$ to $+302^\circ\text{F}(+150^\circ\text{C})$

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707 FAX: 1-972-867-6669

Max. working area: 2.5" x 2.5"
Lead length: .090" min. - .130" max
Lead size accepted: .018" ϕ - .022" ϕ

Contact tail (.13" lg x .010" x .028")
Material: Beryllium Copper
Plating: 30 μ (.76 μm) Gold-MIL-G-45204
Type II, Grade C over 50 μ (1.3 μm)
Sulfamate Nickel per QQ-N-290A