




4680 Series 1296-4680-001A

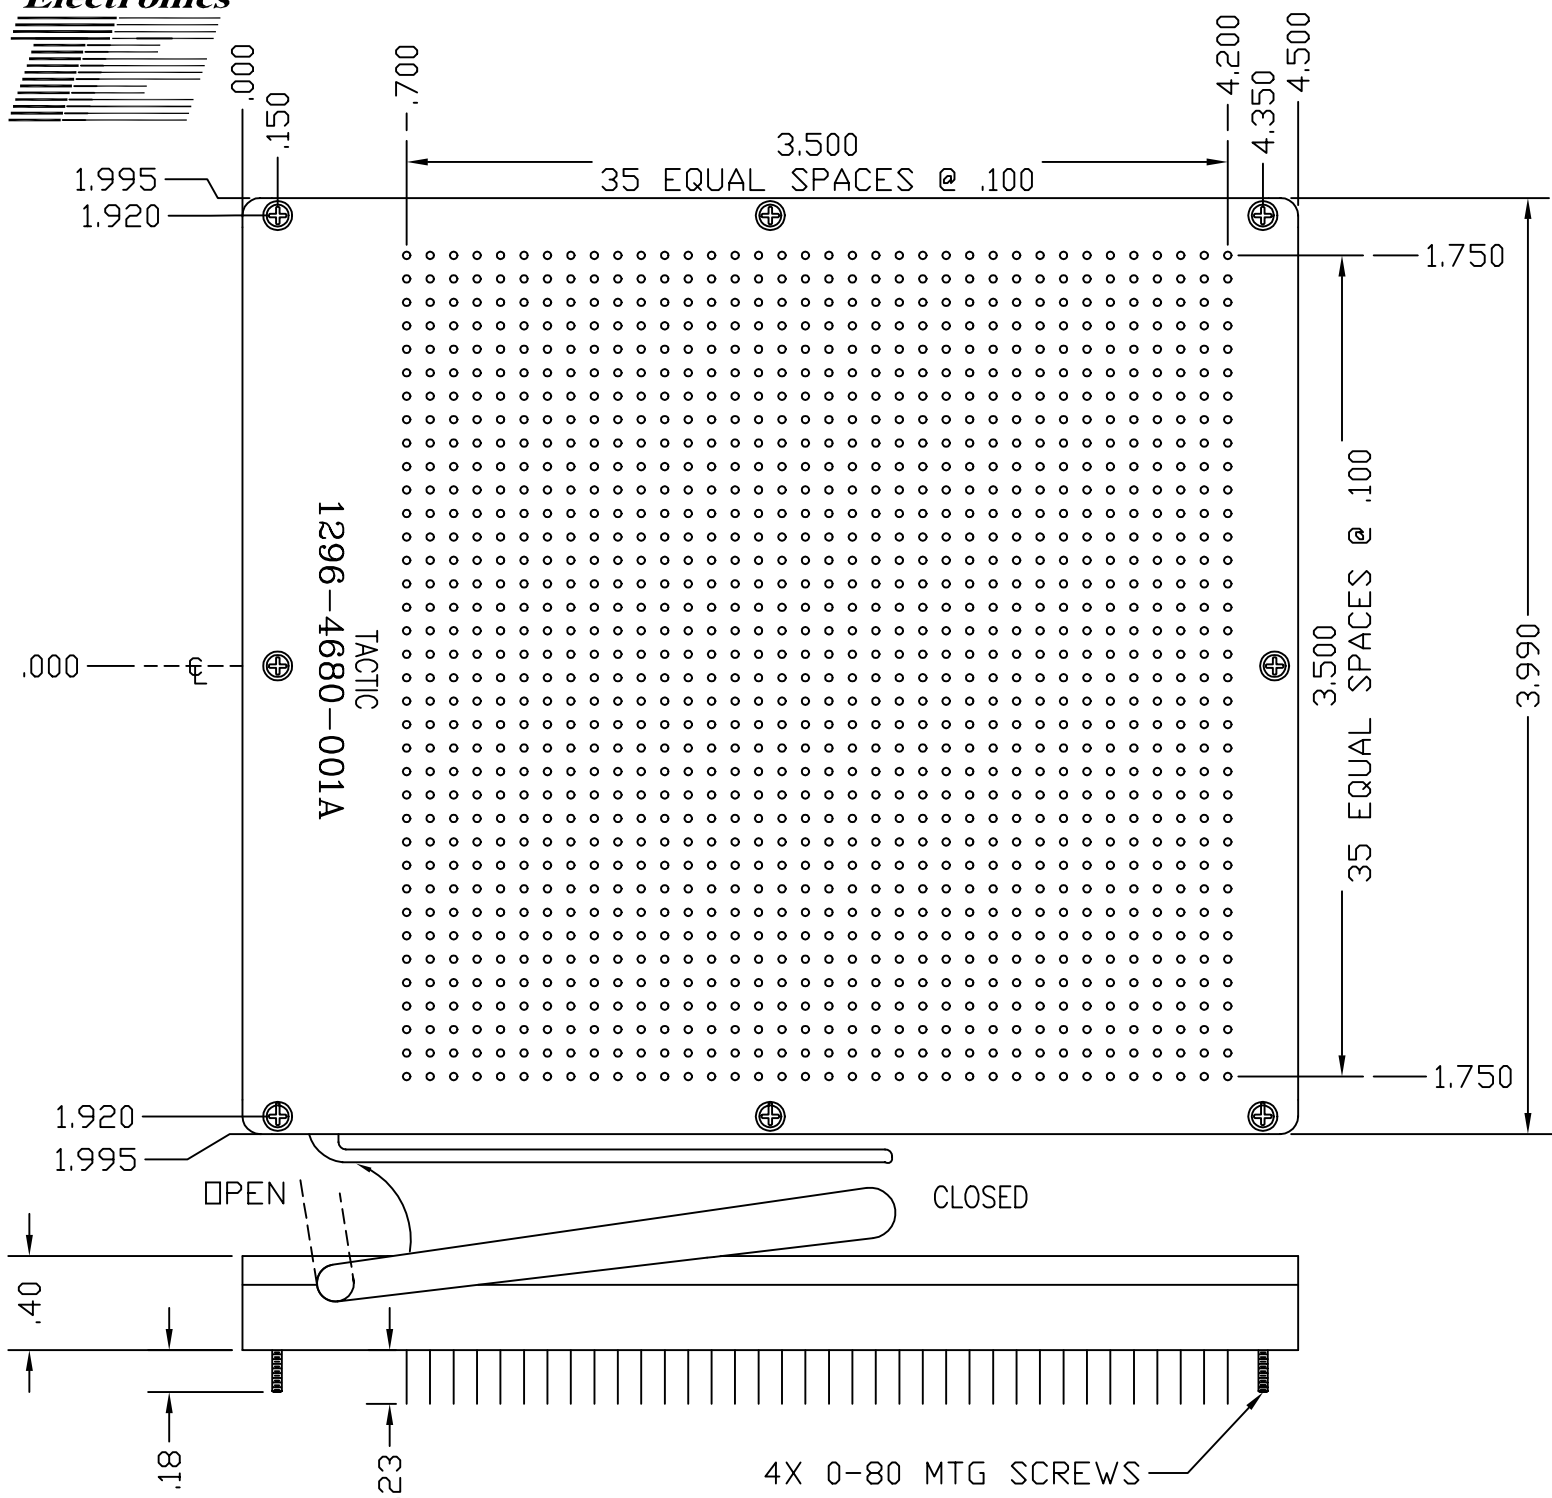

Max. working area: 3.5" x 3.5"
Lead length: .090" min. - .130" max
Lead size accepted: .018"φ - .022"φ

Physical Insulation material: Glass Reinforced; Polysulfone and P1700 Polysulfone
Flammability: UL 94V-0
Color: Green and Amber

Contact tail (.23" lg x .010" x .018")
Material: Beryllium Copper
Plating: 30μ(.76μm)Gold-MIL-G-45204
Type II, Grade C over 50μ(1.3μm)
Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
Insulation Resistance: >1x10⁹Ω at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707 FAX: 1-972-867-6669