




4662 Series 150-4662-002A

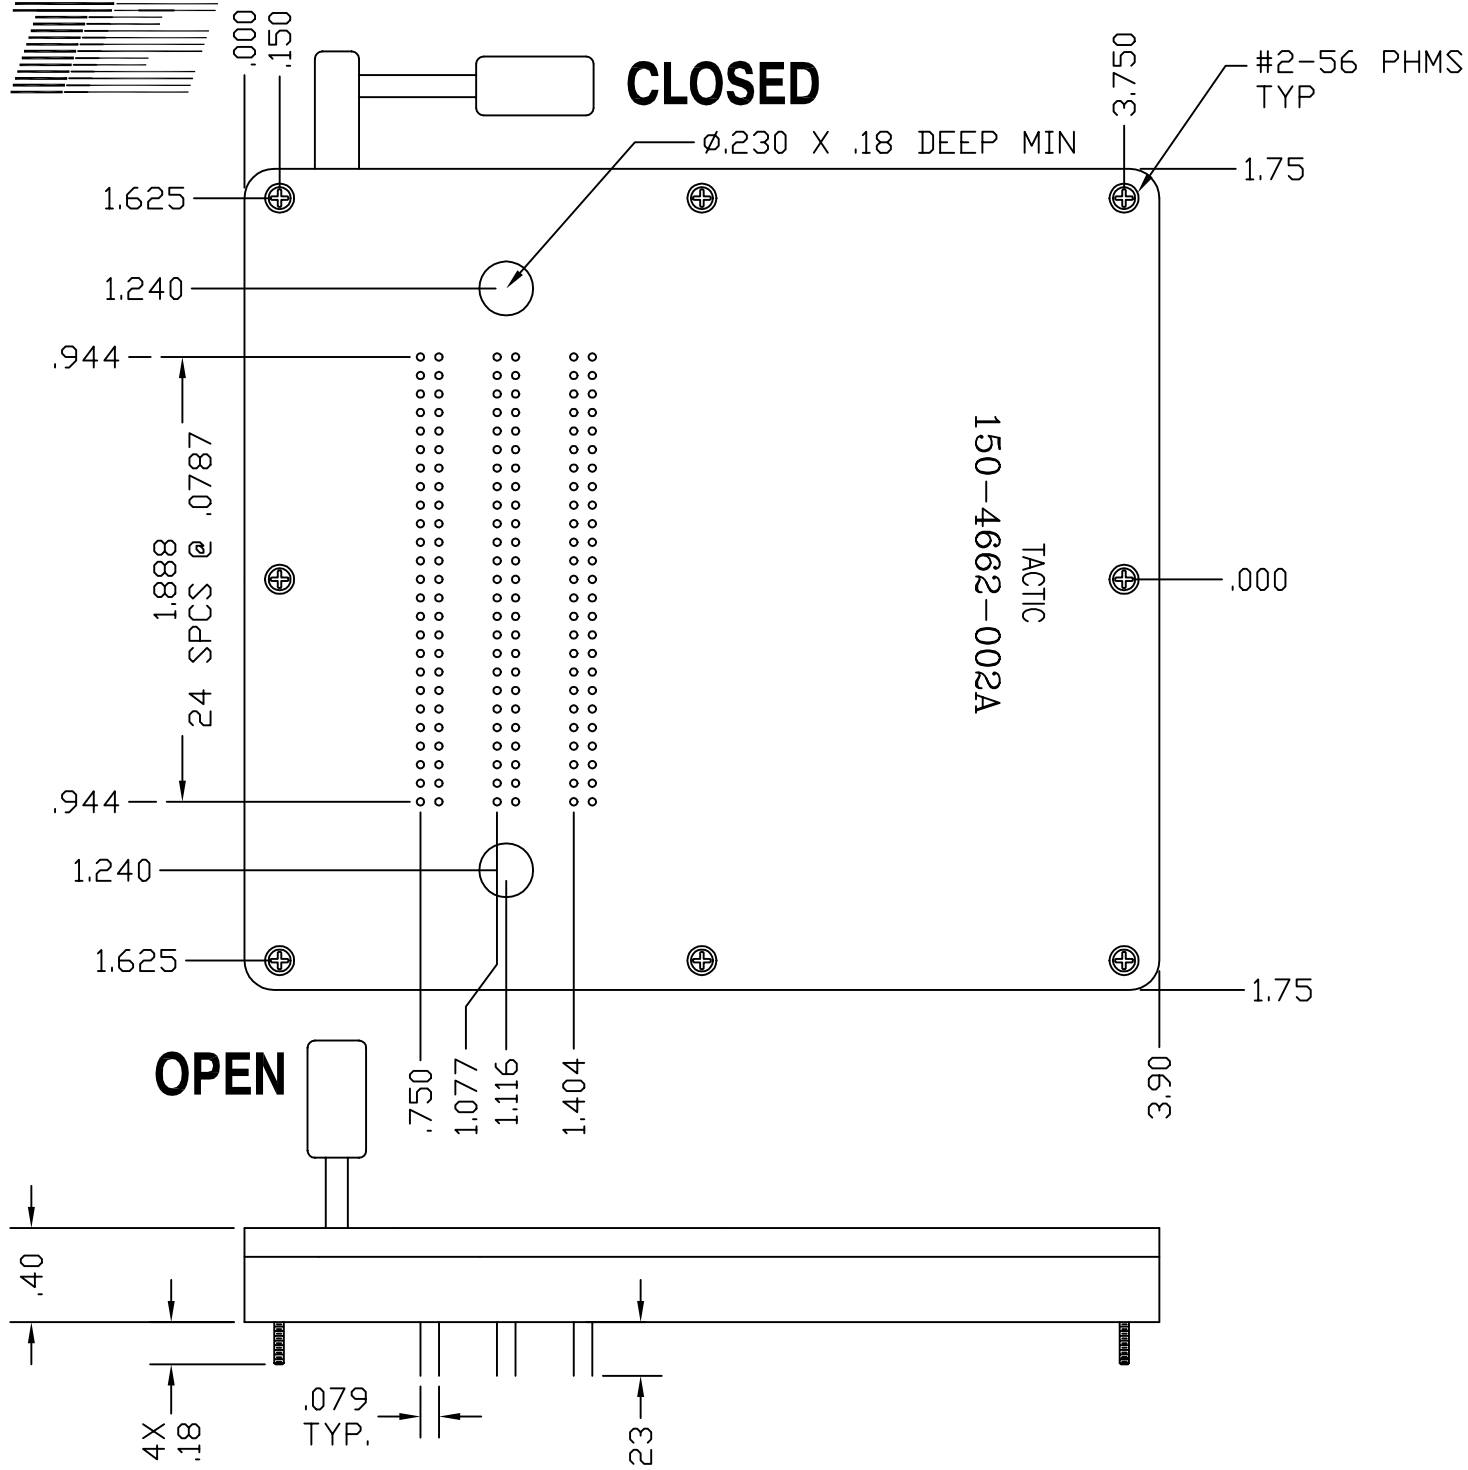

This series is identical to previously mentioned series; size is the only difference.

Max. working area: 2.5" x 2.5"  
Min. lead length: .100"  
Lead size accepted: .018" dia.

## Physical

al Insulation  
material: Glass Reinforced; Polysulfone  
Flammability: UL 94V-0  
Color: Green

Contact (.23" lg x .010" x .018")  
Material: Beryllium Copper  
Plating: 30μ(.76μm)Gold-MIL-G-45204  
Type II, Grade C over 50μ(1.3μm)  
Sulfamate Nickel per QQ-N-290A

---

Electrical

cal Current Rating: 1 Amp  
Insulation Resistance:  $>1 \times 10^9 \Omega$  at 500Vdc  
Withstanding Voltage: 1000 Vrms at Sea Level

## Environmental

Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707 FAX: 1-972-867-6669