



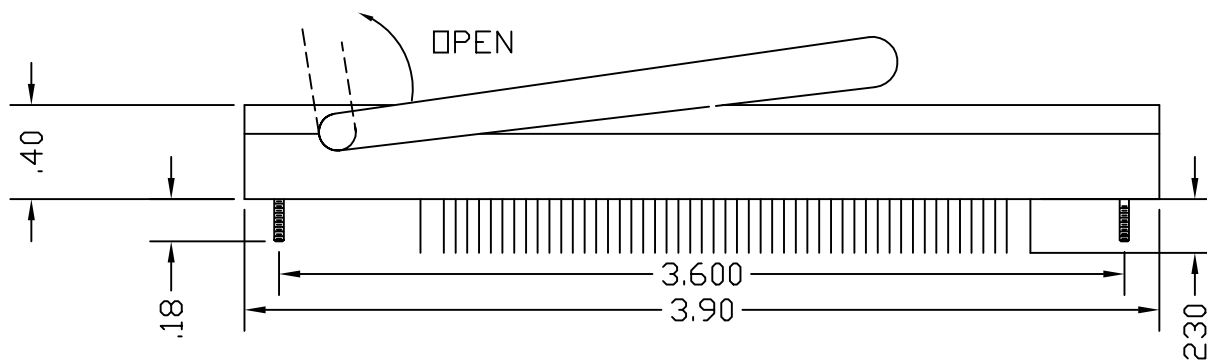

4662 Series 192-4662-001A

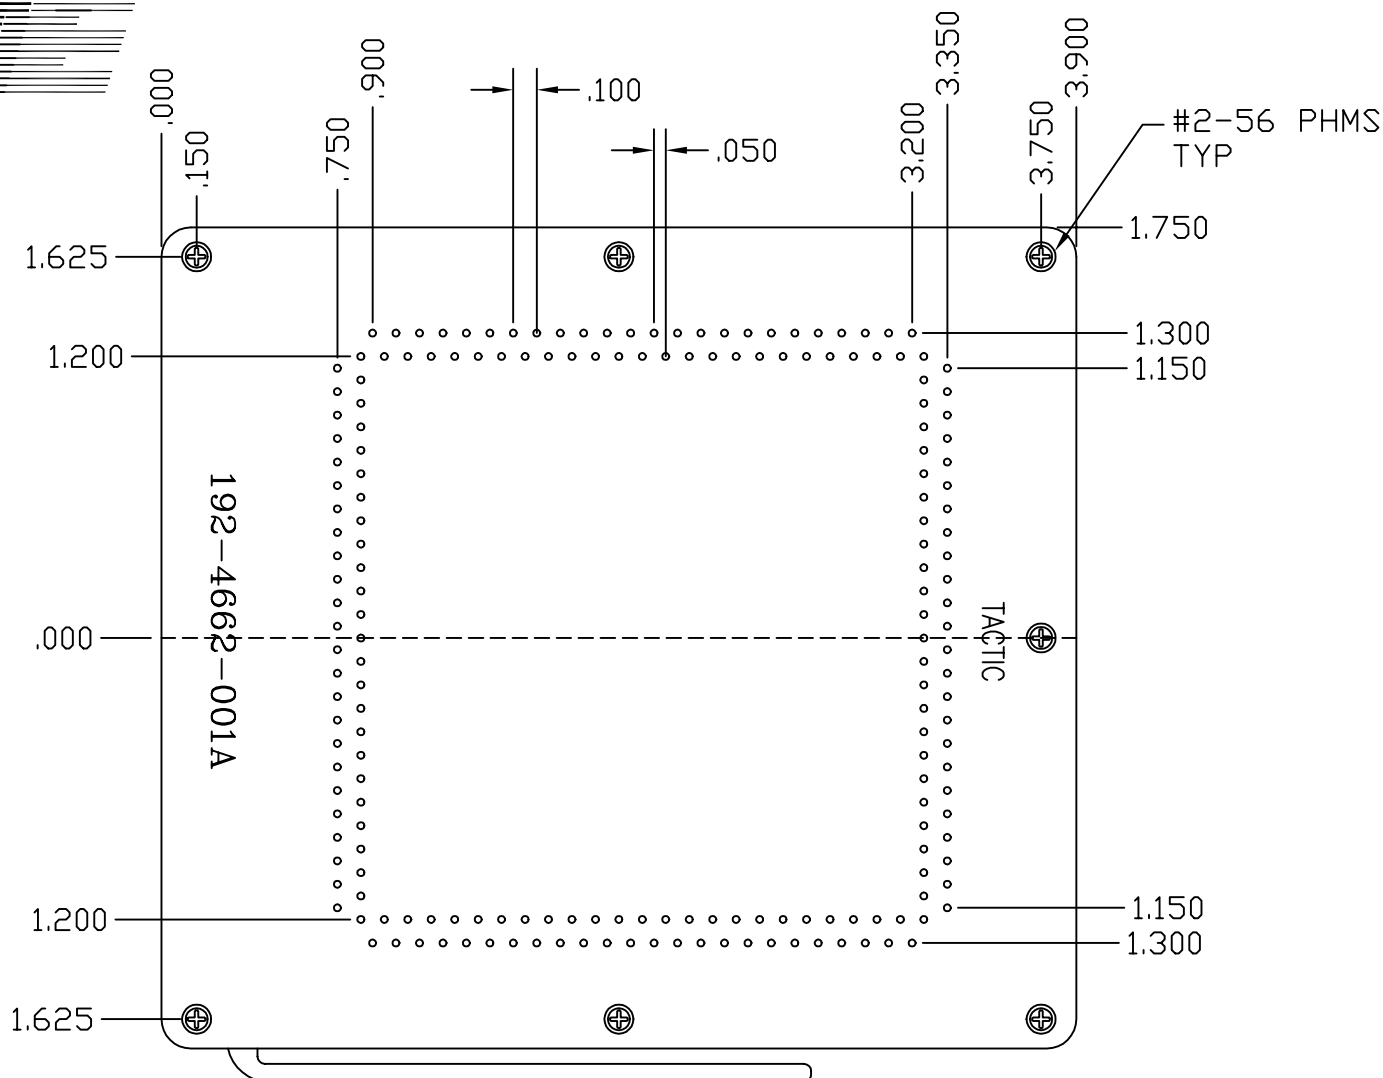

This series is identical to previously mentioned series; size is the only difference.

Max. working area: 2.6" x 2.6"
Min. lead length: .125"
Lead size accepted: .018"

Physical	Insulation material: Glass Reinforced; Polysulfone
	Flammability: UL 94V-0
	Color: Green

Contact (.23" lg x .010" x .018")
Material: Beryllium Copper
Plating: 30μ(.76μm)Gold-MIL-G-45204
Type II, Grade C over 50μ(1.3μm)
Sulfamate Nickel per QQ-N-290A

Electrical	Current Rating: 1 Amp Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc Withstanding Voltage: 1000 Vrms at Sea Level
-------------------	---

Environmental	Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)
----------------------	--

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707 FAX: 1-972-867-6669