




4662 Series 204-4662-001A

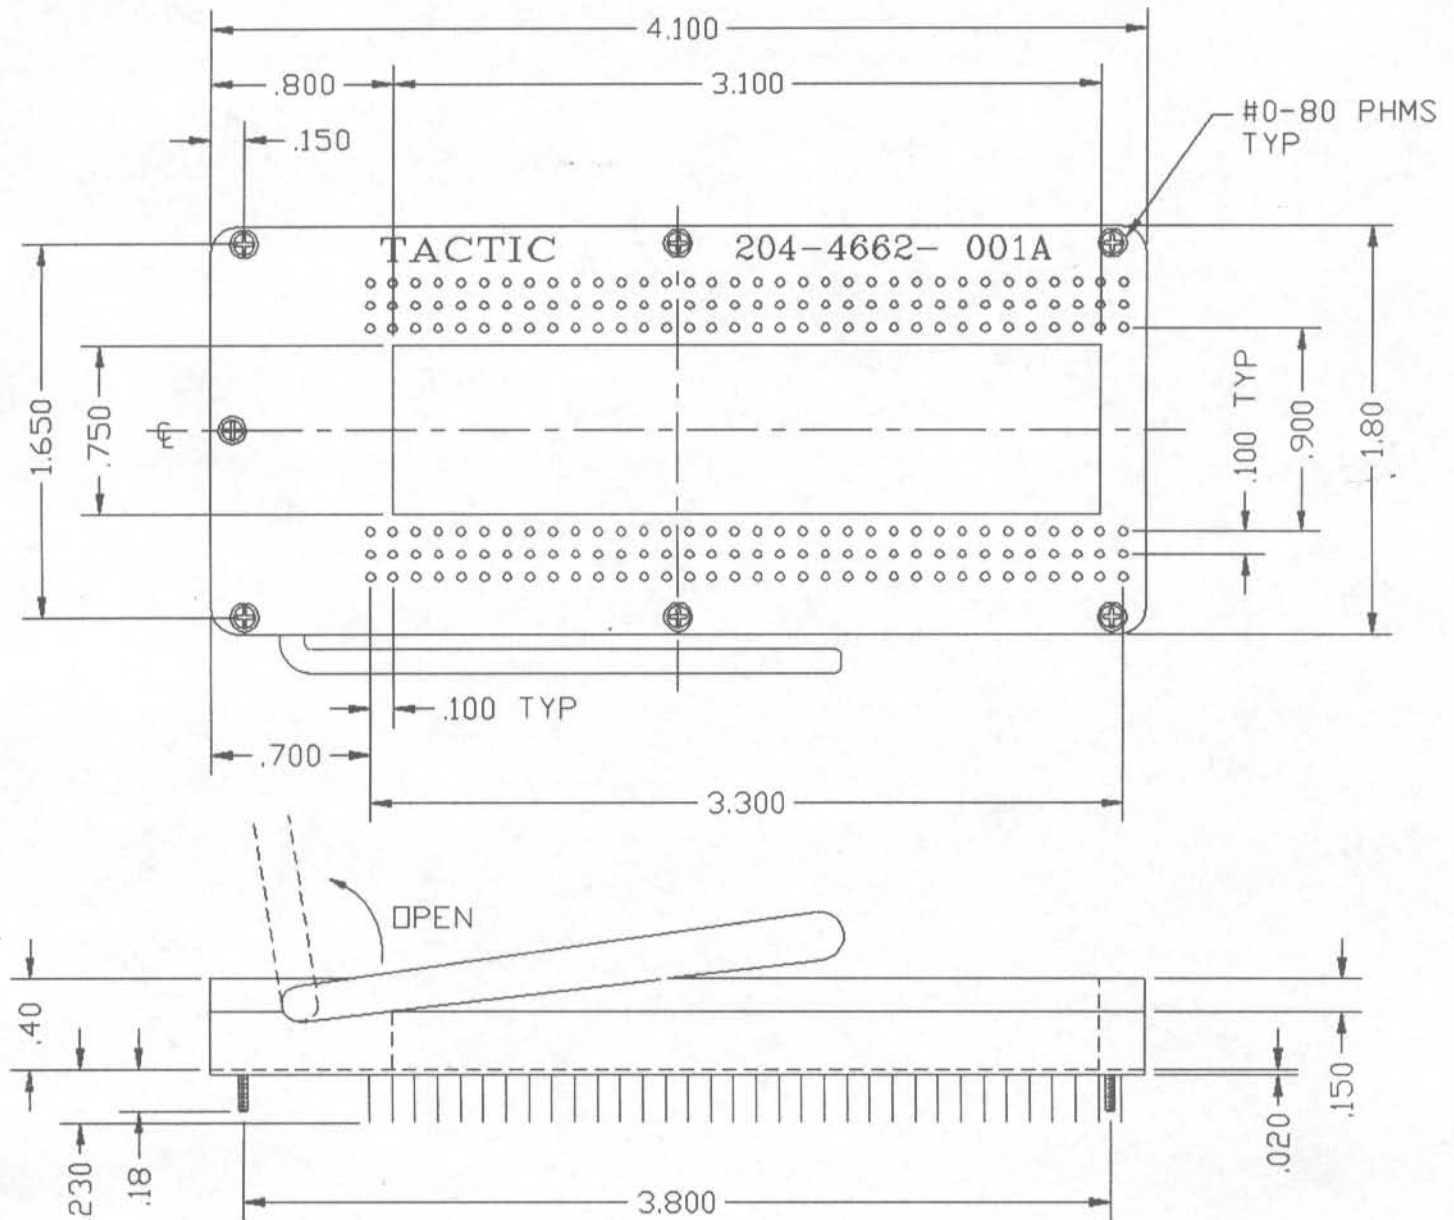

This series is identical to previously mentioned series; size is the only difference.

Max. working area:
Min. lead length: .115"
Lead size accepted: .018" - .020"

Physical Insulation material: Glass Reinforced; Polysulfone
Flammability: UL 94V-0
Color: Green

Contact (.130" lg x .010" x .028")
Material: Beryllium Copper
Plating: 30 μ (.76 μ m) Gold-MIL-G-45204
Type II, Grade C over 50 μ (1.3 μ m)
Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707