




4662 Series 216-4662-001A

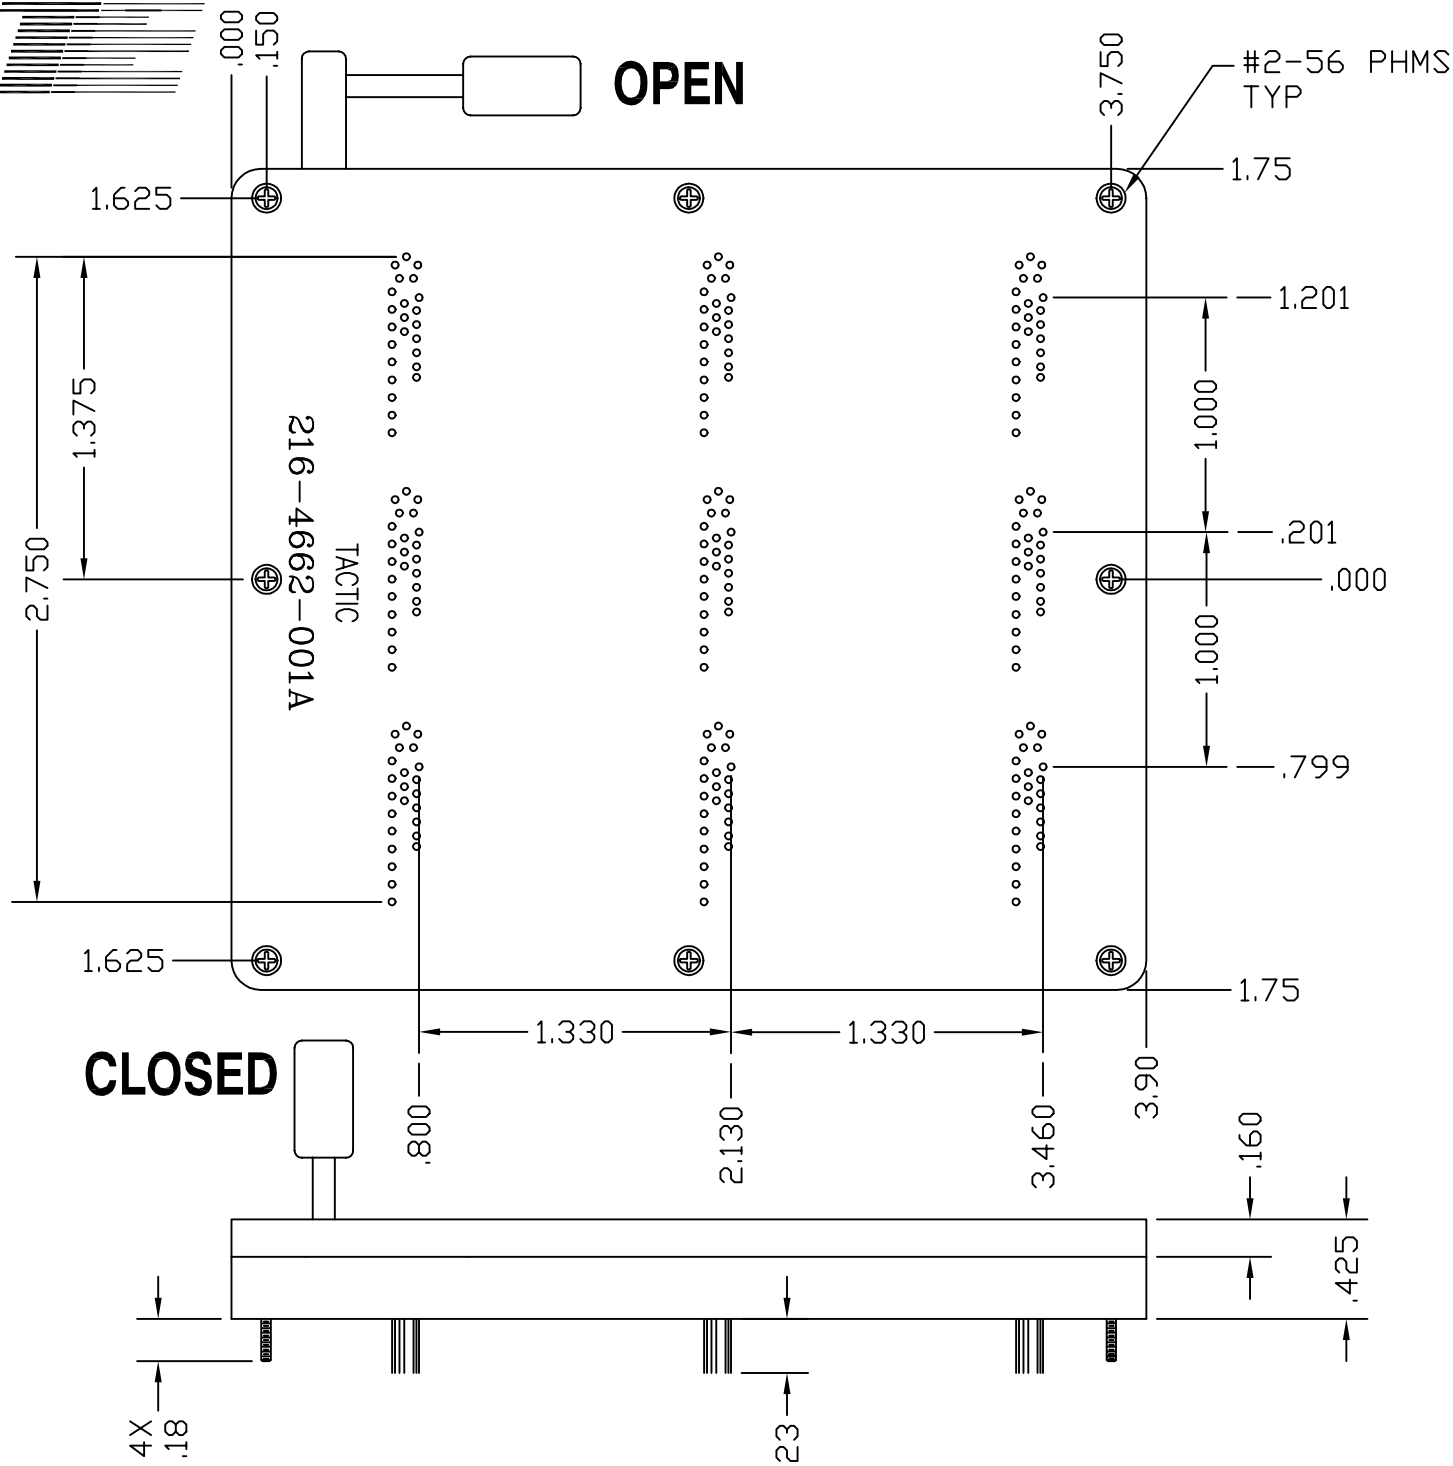

TOTAL HOLES = 216

HOLE PATTERN DIMENSIONS CAN BE LOCATED ON DWG. TB-42144

Max. working area: 2.75" x 2.75"
Lead length: .125" - .170"
Lead size accepted: .015" dia.

Physical Insulation material: Glass Reinforced; Polysulfone
Flammability: UL 94V-0
Color: Green

Contact (.23" lg x .010" x .018")
Material: Beryllium Copper
Plating: 30μ(.76μm)Gold-MIL-G-45204
Type II, Grade C over 50μ(1.3μm)
Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707 FAX: 1-972-867-6669