




4662 Series 243-4662-001A

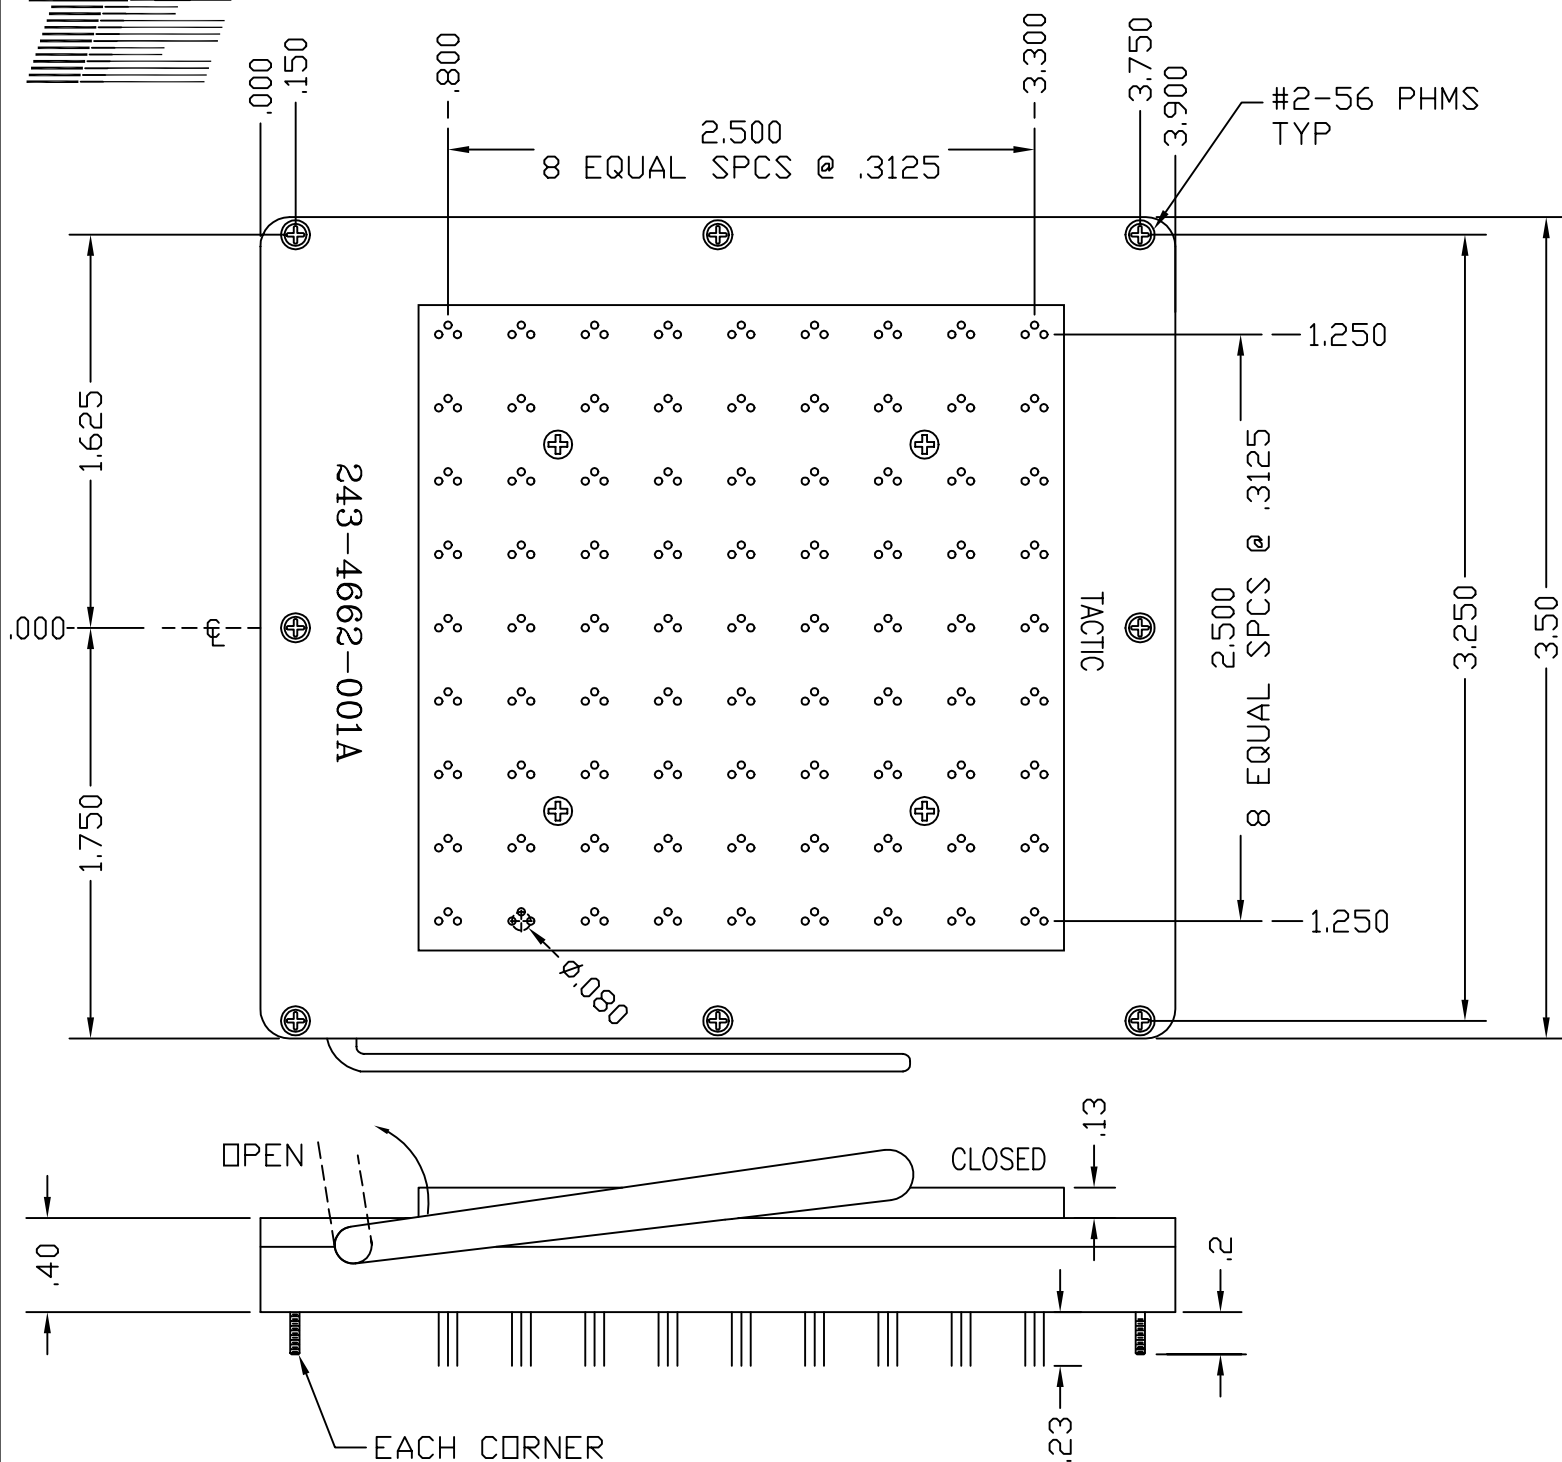

Physical	Insulation material: Glass Reinforced; Polysulfone
	Flammability: UL 94V-0
	Color: Green

Electrical	Current Rating: 1 Amp
	Insulation Resistance: >1x10 ⁹ Ω at 500Vdc
	Withstanding Voltage: 1000 Vrms at Sea Level

Environmental	Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)
----------------------	--

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707 FAX: 1-972-867-6669

Max. working area: 2.5" x 2.5"
Lead length: .090" min. — .130" max
Lead size accepted: .018"Ø

Contact tail (.23" lg x .010" x .018")
Material: Beryllium Copper
Plating: 30 μ "(.76 μ m)Gold-MIL-G-45204
Type II,Grade C over 50 μ "(1.3 μ m)
Sulfamate Nickel per QQ-N-290A