




4940 Series 250-4940-001A

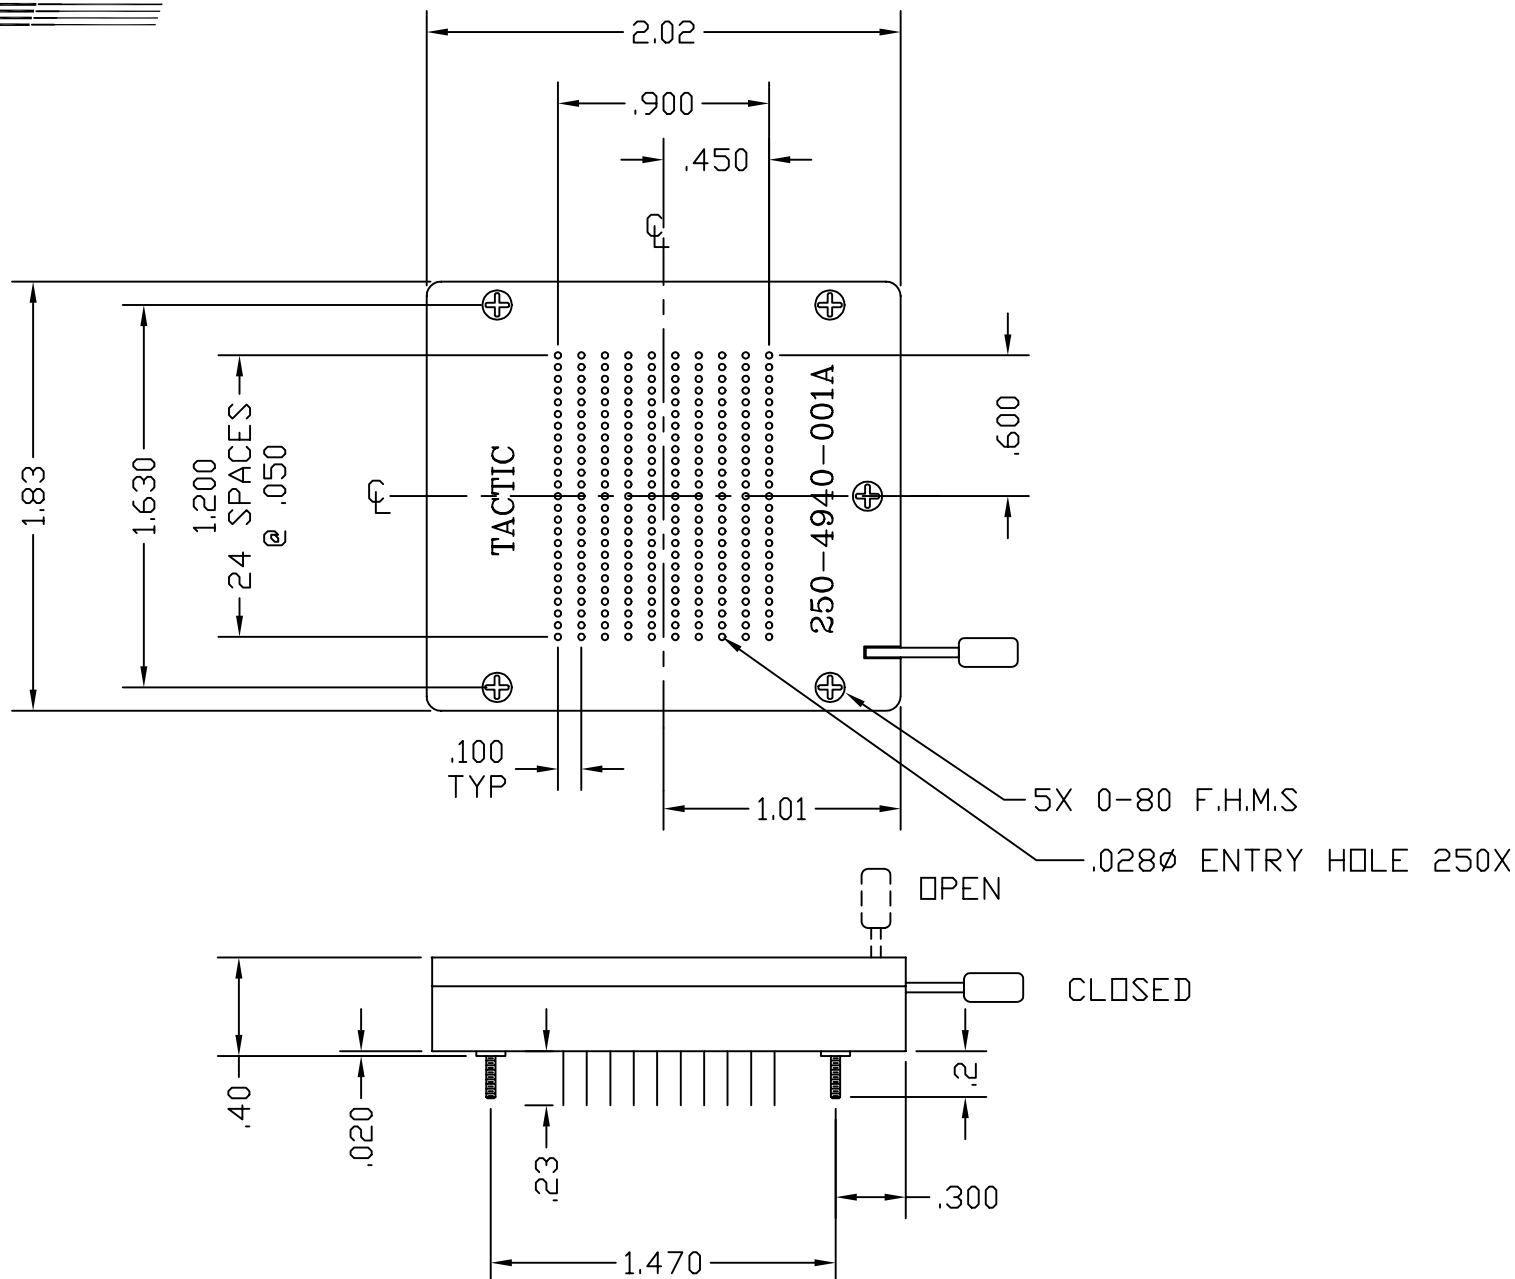

Physical Insulation material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-0
 Color: Green

Contact Tail: .23 lg x .010" x .018"
 Material: Beryllium Copper
 Plating: 30 μ "(.76 μ m)Gold-MIL-G-45204
 Type II, Grade C over 50 μ " 1.3 μ m)
 Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
 Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Lead size accepted:
 .012"x.015"x .130" long

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local Tactic Distributor for design and pricing.
 Phone: 1-800-955-4707 FAX: 1-972-867-6669