




4672 Series ZIF Socket

268-4672-001A

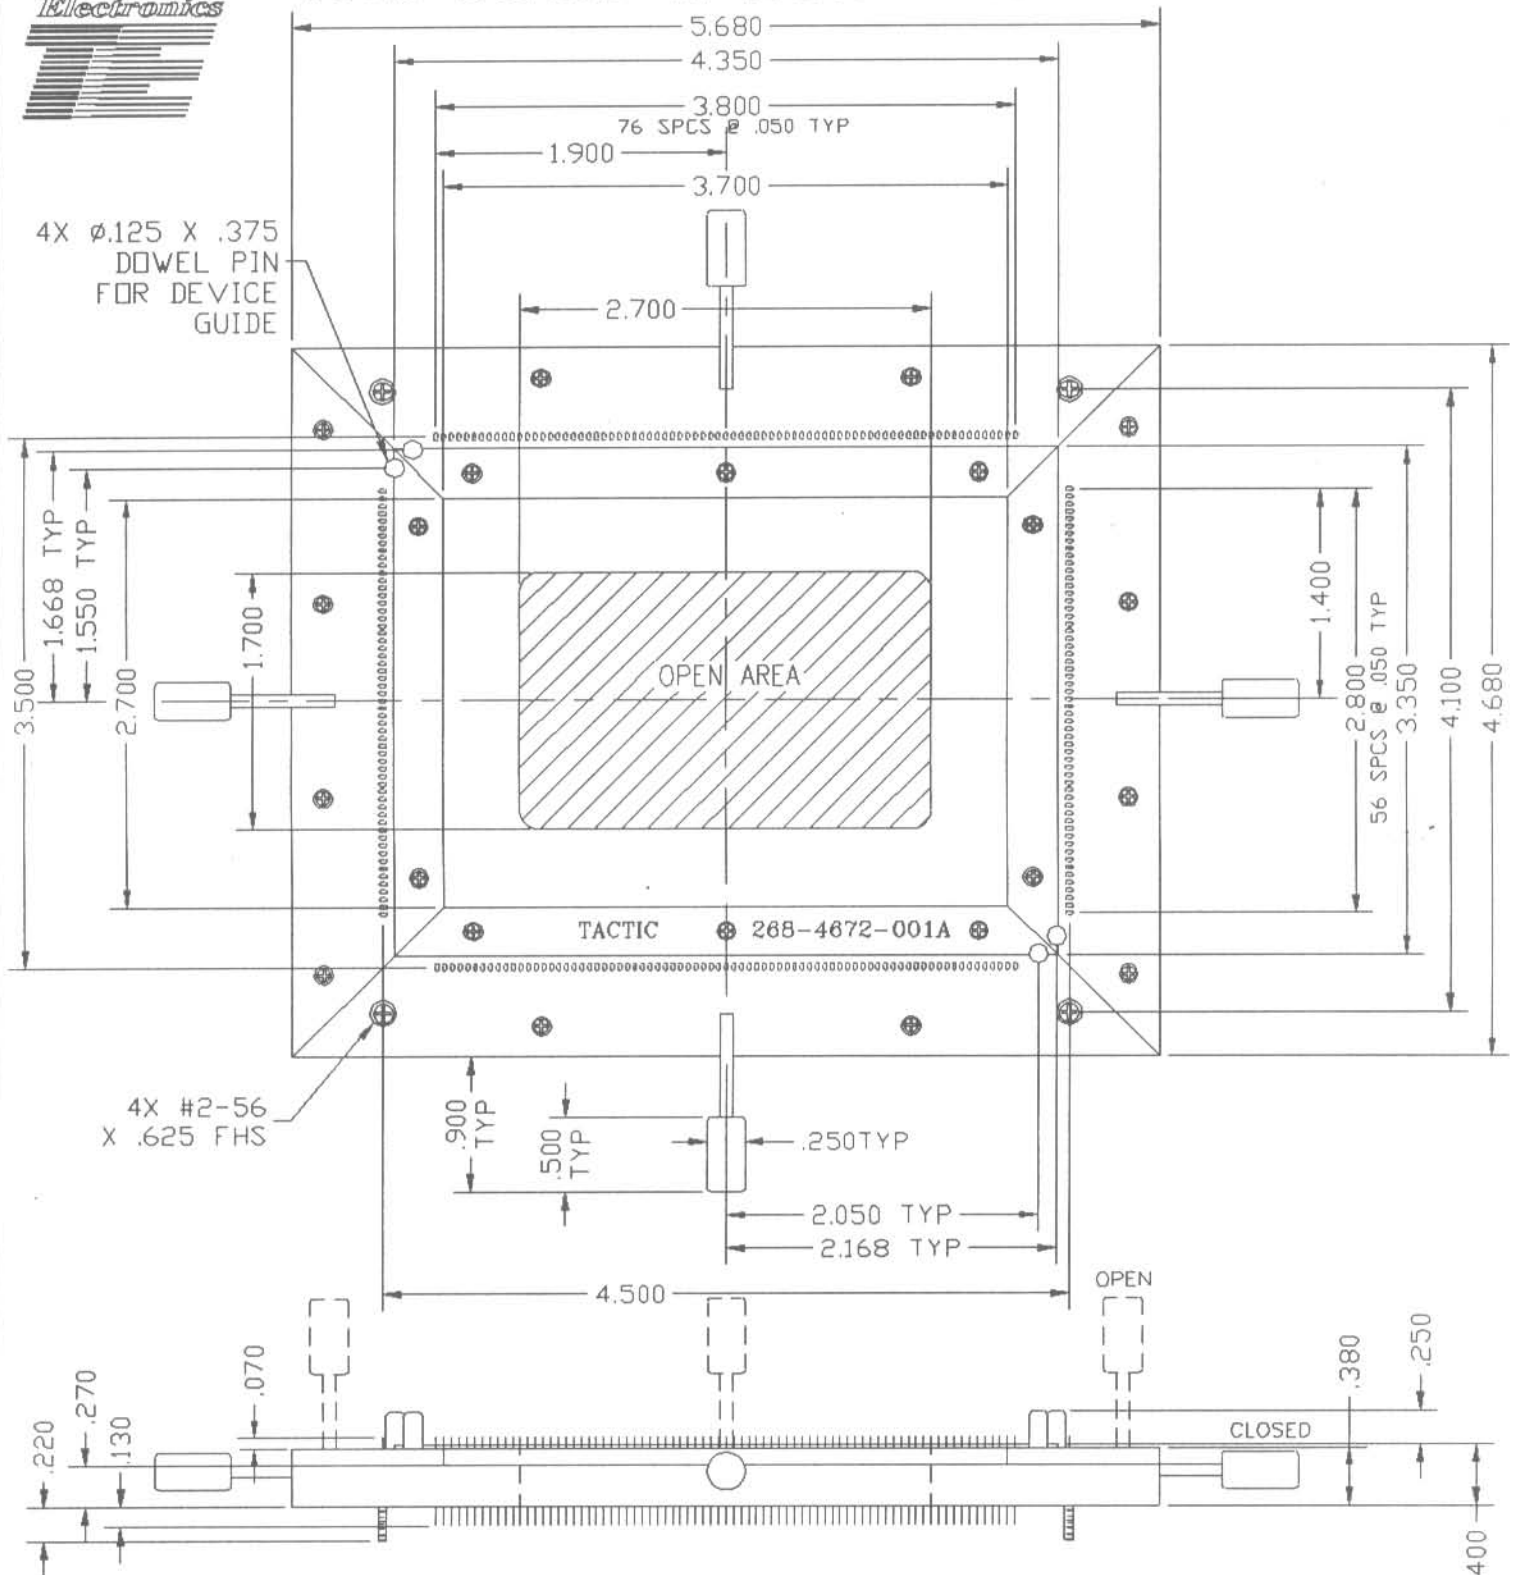

Physical	Insulation
	material: Glass Reinforced; Polysulfone
	Flammability: UL 94V-0
	Color: Green

Contact (.130" lg x .010" x .018")
Material: Beryllium Copper
Plating: 30μ(.76μm)Gold-MIL-G-45204
Type II, Grade C over 50μ(1.3μm)
Sulfamate Nickel per QQ-N-290A

Electrical

Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating Operational:

-67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.
Phone: 1-800-955-4707