




ZIF SOCKET

40H

REV.	DATE
B	07/01/00

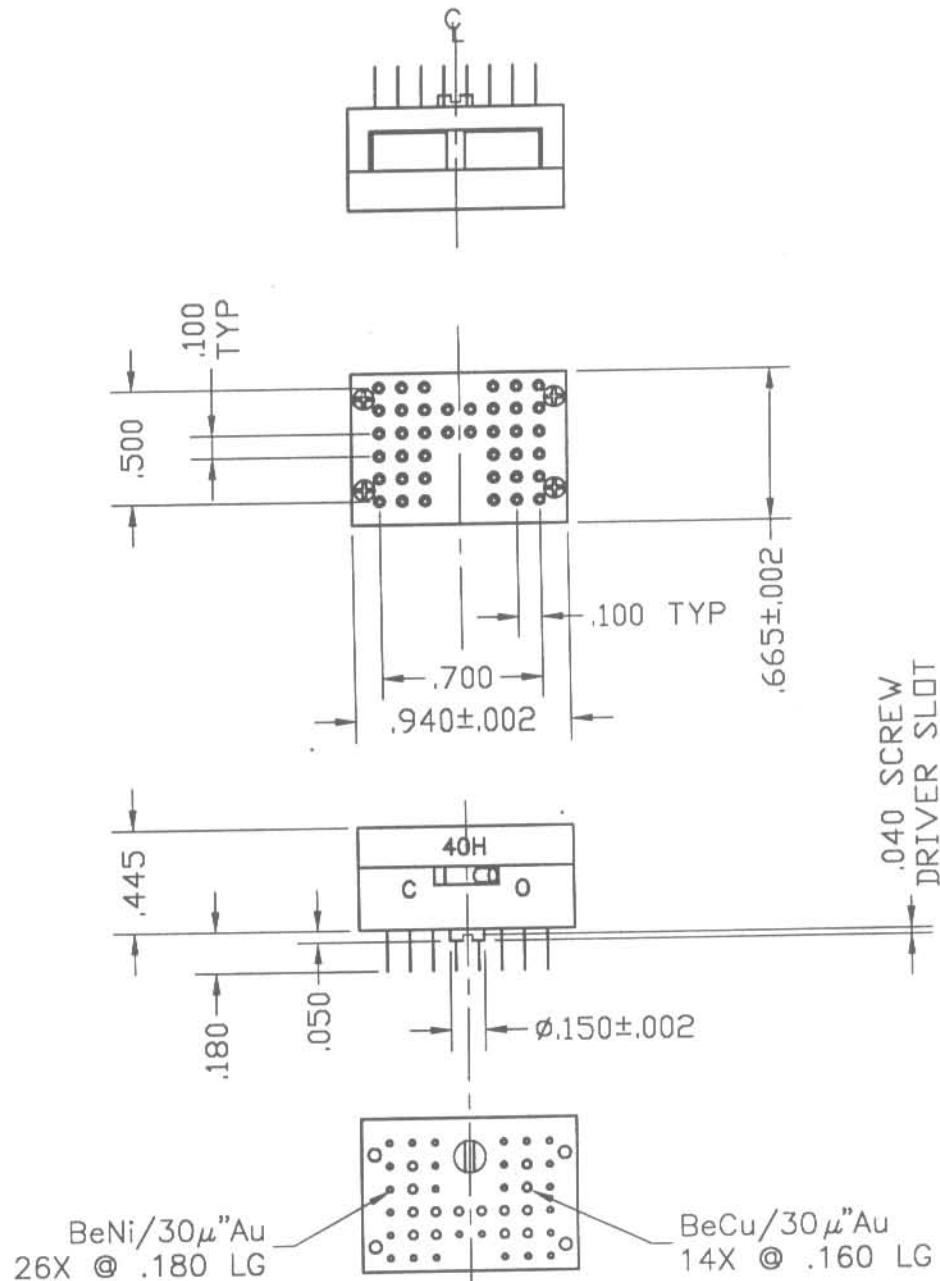

NOTE: Entry and exit patterns are the same.

Physical Insulation material: Molded/Machined Torlon and Stainless Steel
 Flammability: UL 94V-0
 Color: Brown

Contact (.160" lg x .012" x .024"— 14 PLCS)
 (.180" lg x .010" x .018"— 26 PLCS)
 Material: Beryllium Copper (14X)
 Beryllium Nickel (26X)
 Plating: 30μ (.76μm) Gold—MIL-G-45204
 Type II, Grade C over 50μ (1.3μm)
 Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Consult factory or your local TACTIC Distributor for design and pricing.
Phone: 1-800-955-4707