


# 4672 Series ZIF Socket

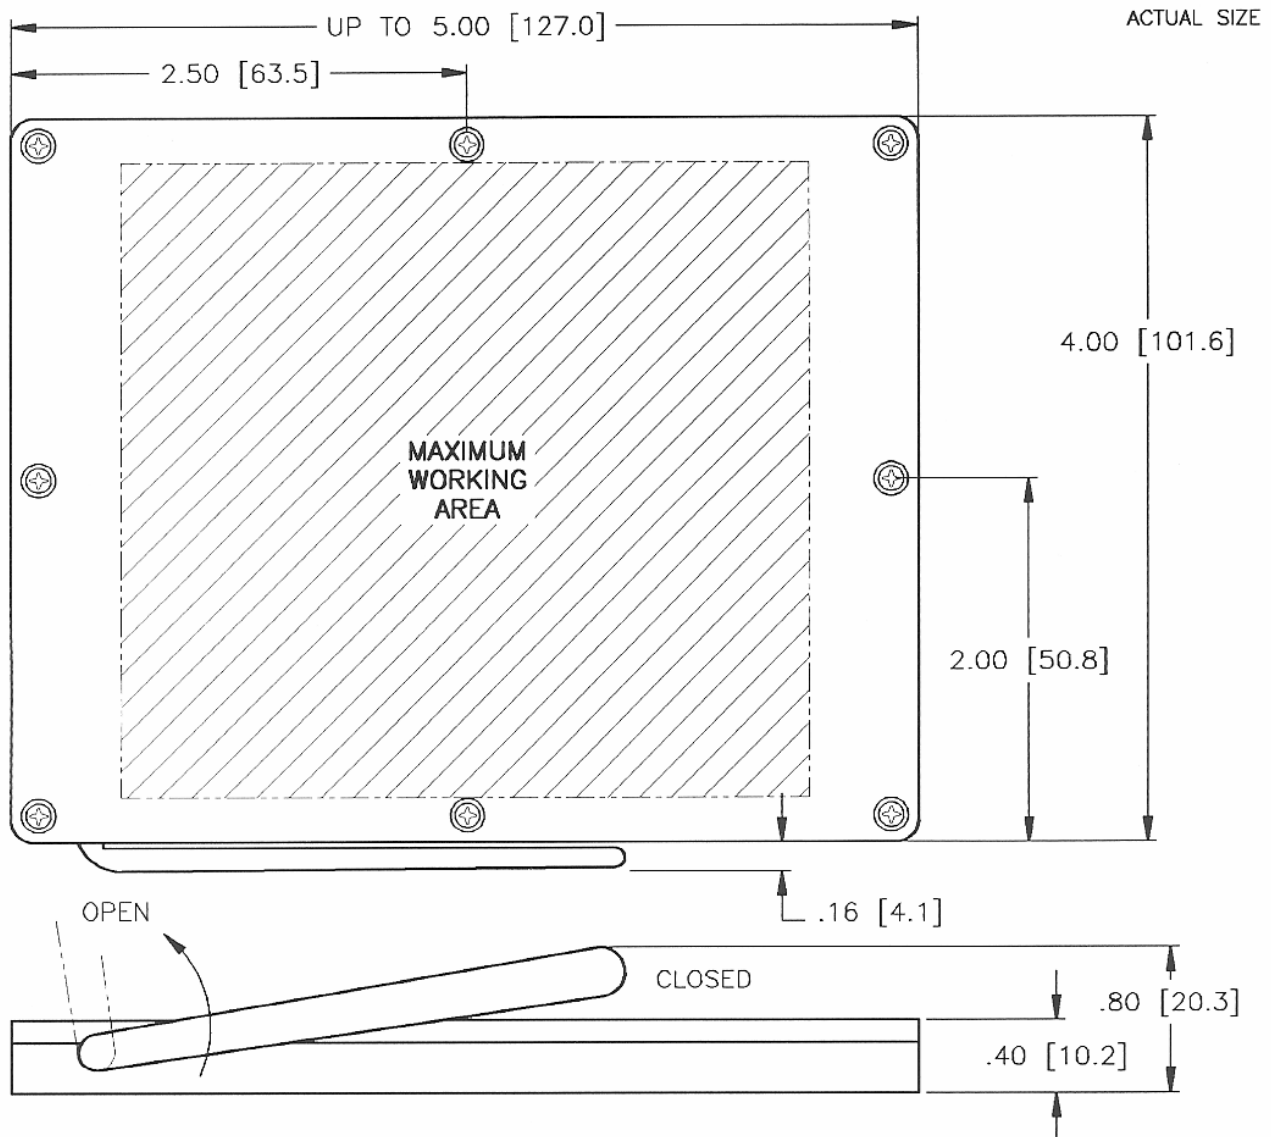

This series is designed for larger devices.

Maximum working area: 3.5" x 3.8"

Minimum lead length: .100"

Lead size accepted: .012" - .008"

<b>Physical</b>	Insulation	Contact (.130" long x .010" x .028")
	material: Glass Reinforced; Polysulfone	Material: Beryllium Copper
	Flammability: UL 94V-0	Plating: 30μ" (.76μm) Gold - MIL-G-45204
	Color: Green	Type II, Grade C over 50μ" (1.3μm) Sulfamate Nickel per QQ-N-290A

<b>Electrical</b>	Current Rating: 1 Amp
	Insulation Resistance: $> 1 \times 10^9 \Omega$ at 500 Vdc
	Withstanding Voltage: 1000 Vrms at Sea Level

<b>Environmental</b>	Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)
----------------------	--

*Consult factory or your local TMC Distributor for design and pricing.*

**Phone: 1-800-955-4707**