



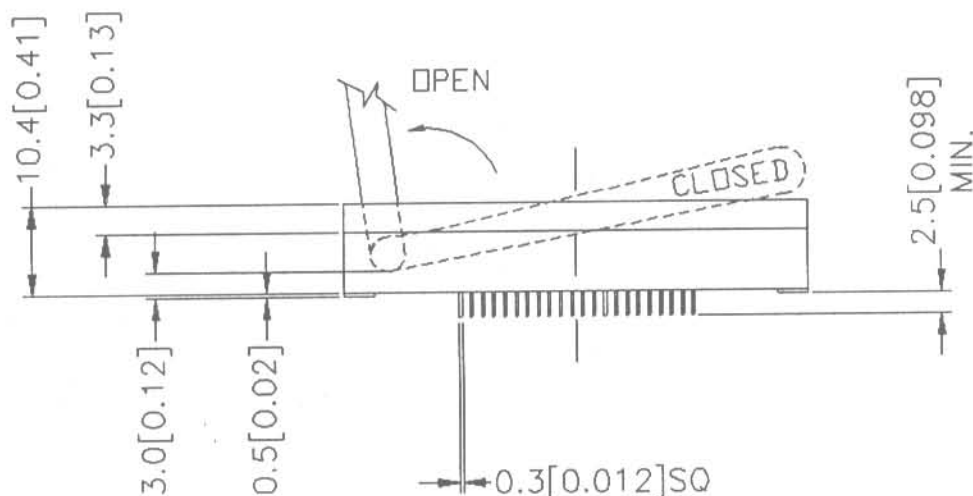

MARCH 6, 2000

4680 Series 484-4680-001A

MARCH 6, 2000

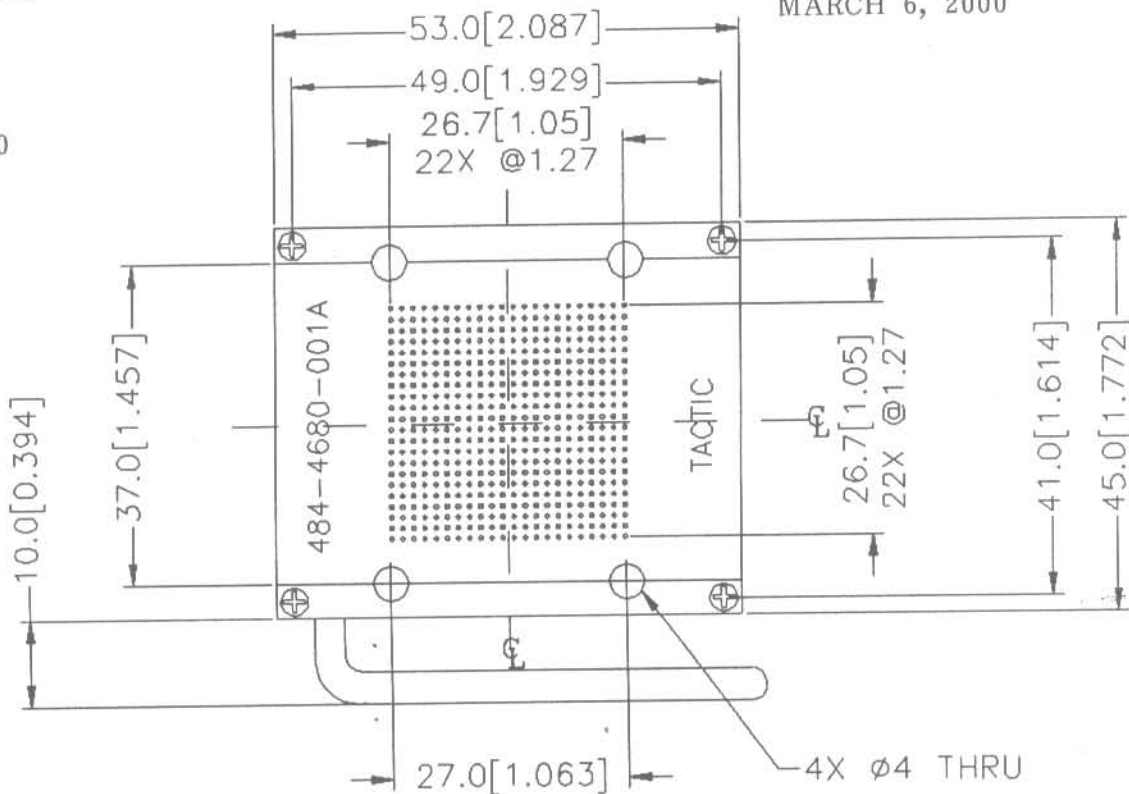

Physical Insulation material: Glass Reinforced; Polysulfone
Flammability: UL 94V-0
Color: Green

Contact .120 min x .012" SQ)
Material: Beryllium Copper
Plating: 30µ (.76µm) Gold-MIL-G-45204
Type II, Grade C over 50µ (1.3µm)
Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
Insulation Resistance: >1x10⁹Ω at 500Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.
Phone: 1-800-955-4707