


4680 Series

512-4680-001A

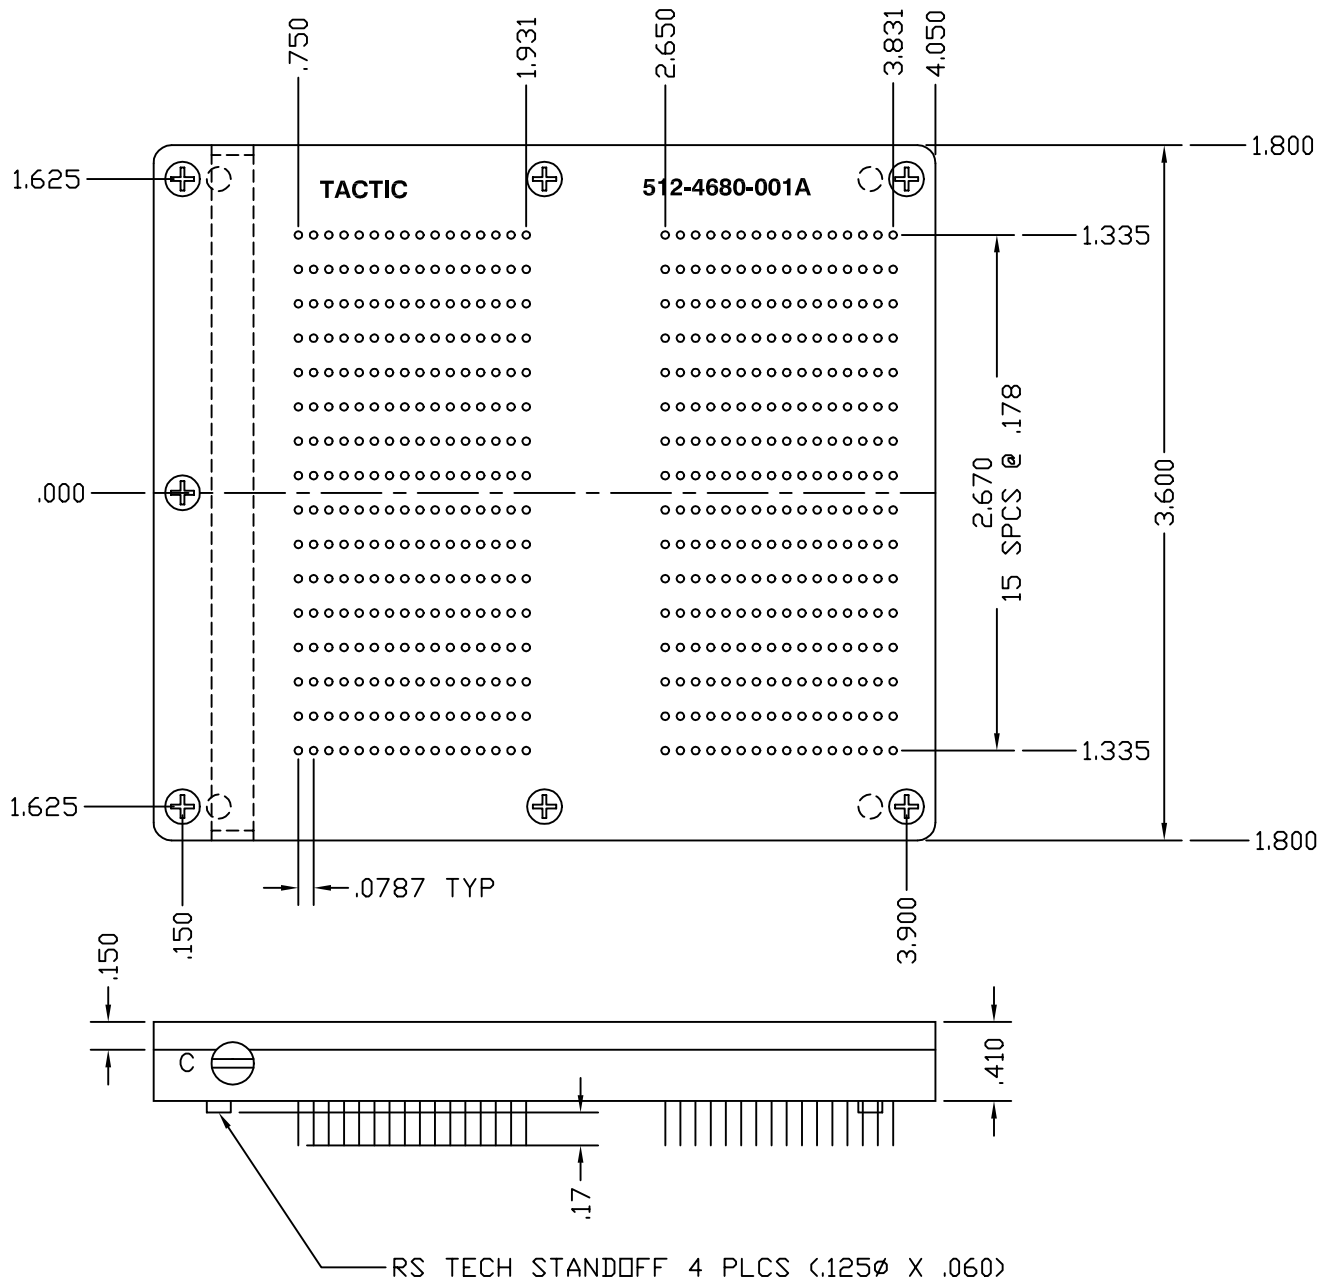

Physical	Insulation material: 30% GF Polysulfone/Ultem Flammability: UL 94V-O Color: Green & Brown	Contact Tail (.010" x .018" x .17 lg) Material: Beryllium Copper Plating: 30 μ "(.76 μ m)Gold-MIL-G-45204 Type II, Grade C over 50 μ "(1.3 μ m) Sulfamate Nickel per QQ-N-290A
Electrical	Current Rating: 1 Amp Insulation Resistance: >1x10 ⁹ Ω at 500Vdc Withstanding Voltage: 1000 Vrms at Sea Level	Lead size accepted .020 sq. Lead length .140 $\pm$.020
Environmental	Temperature Rating Operational: -67°F(-55°C) to +300°F(+150°C)	

Consult factory or your local TACTIC Distributor for design and pricing.
 Phone: 1-800-955-4707 FAX: 1-972-867-6669