




4662 Series 630-4662-001A

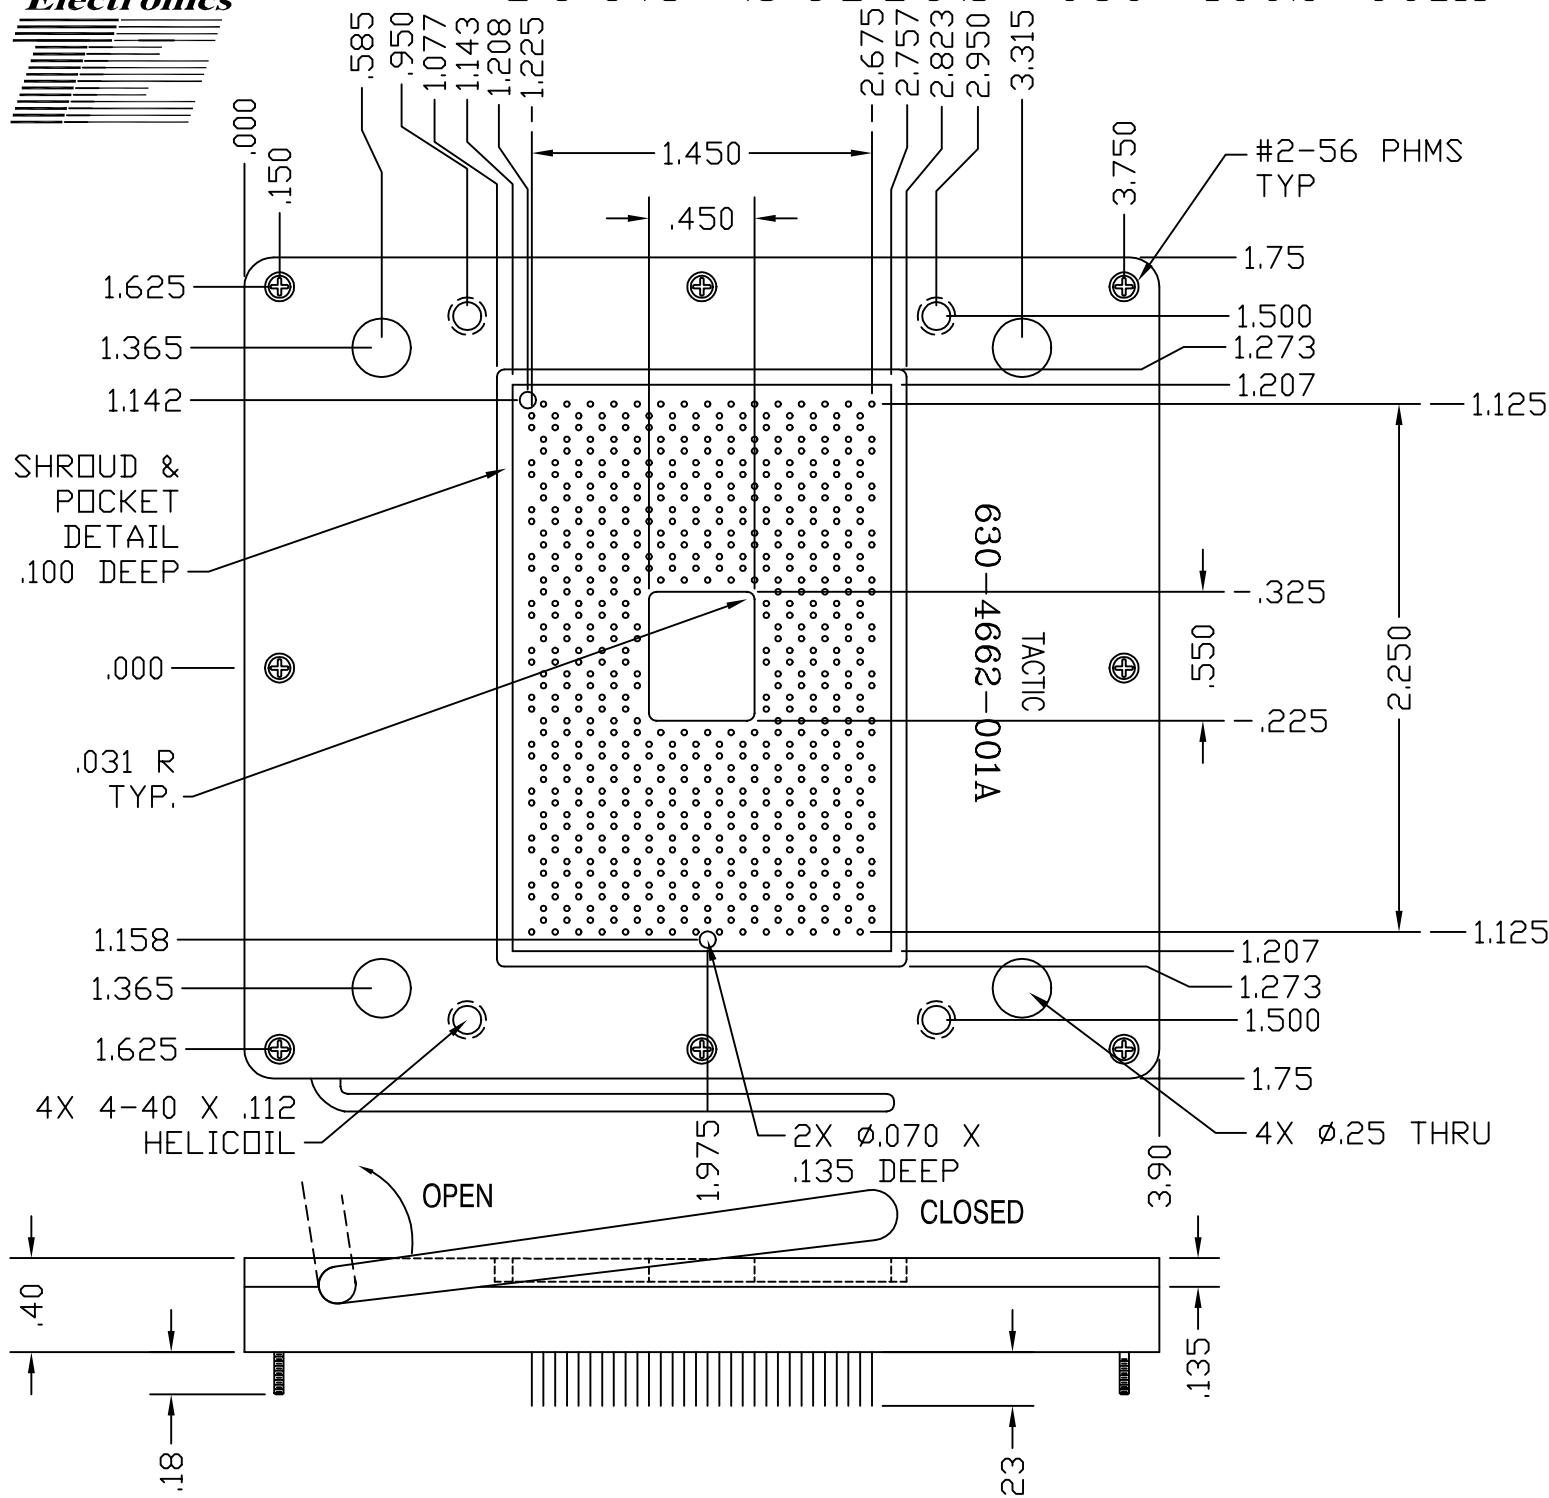

Max. working area: 2.5" x 2.5"
Lead length: .108"
Lead size accepted: .012" dia.

Physical	Insulation material: Glass Reinforced; Polysulfone
	Flammability: UL 94V-0
	Color: Green

Contact (.23" lg x .010" x .018")
Material: Beryllium Copper
Plating: 30μ(.76μm)Gold-MIL-G-45204
Type II, Grade C over 50μ(1.3μm)
Sulfamate Nickel per QQ-N-290A

Electrical	Current Rating: 1 Amp
	Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
	Withstanding Voltage: 1000 Vrms at Sea Level

Environmental	Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)
---------------	--

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707 FAX: 1-972-867-6669