




4680 Series

664-4680-001A

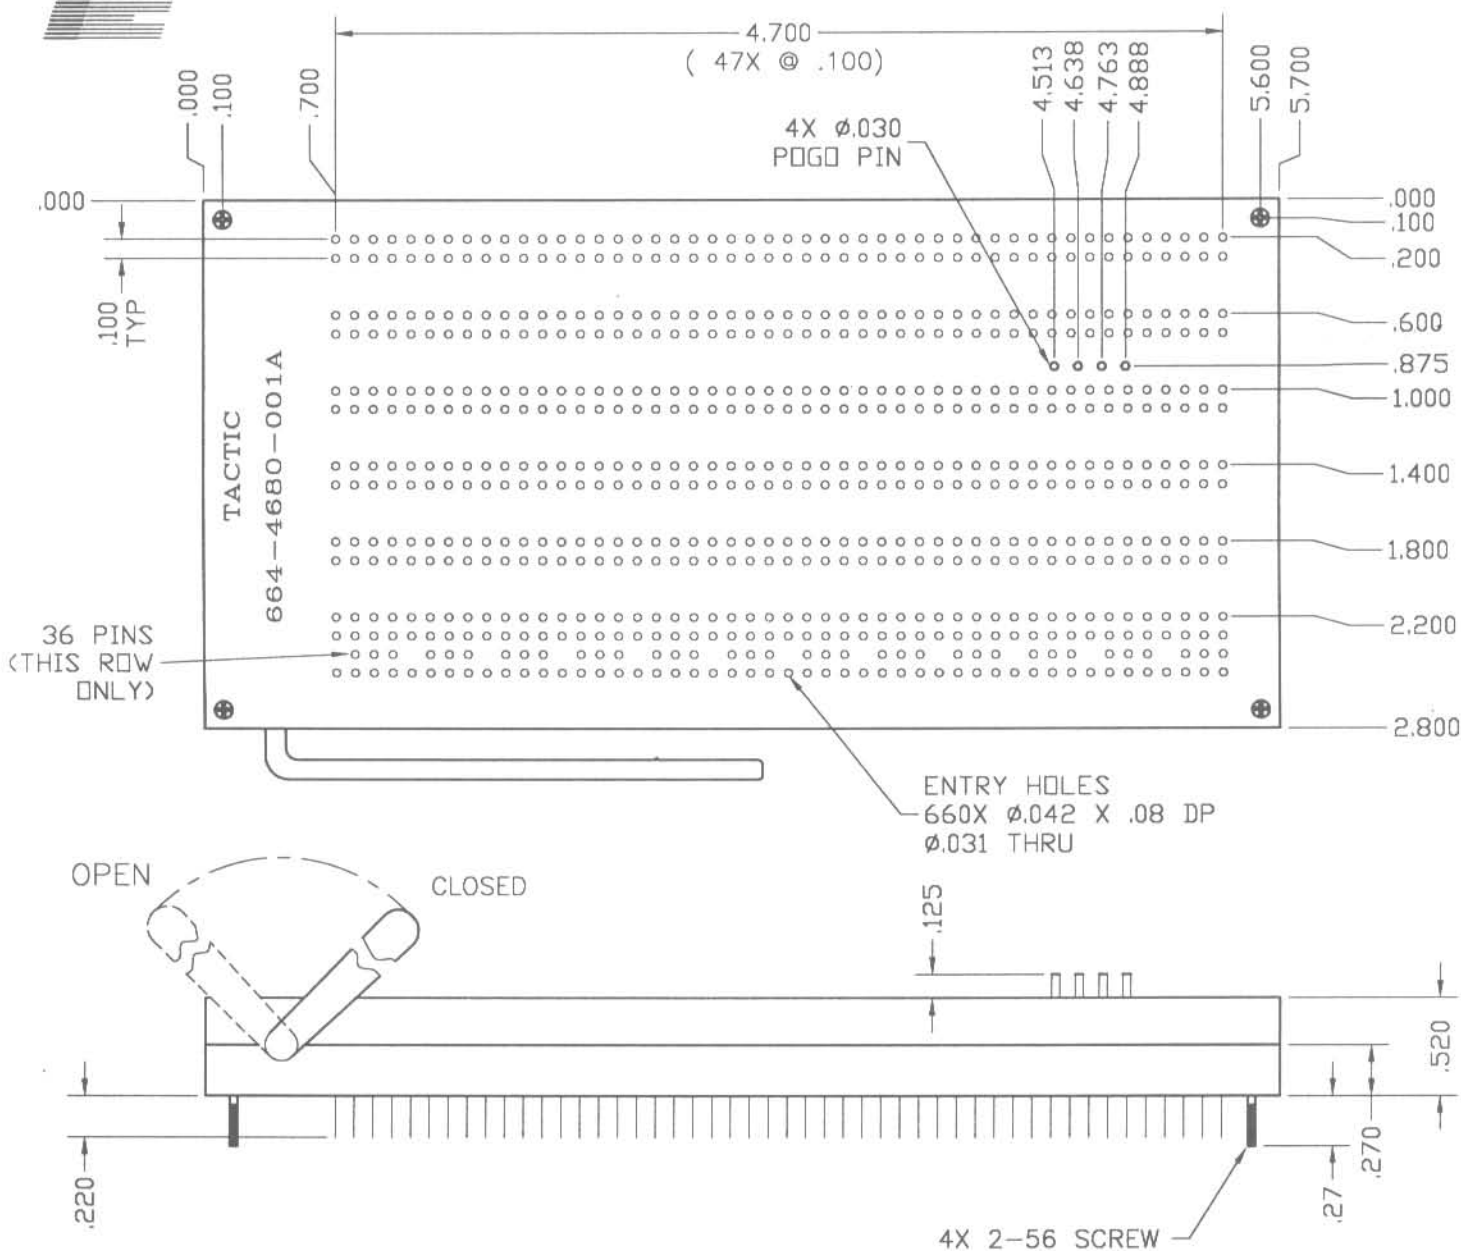

Physical Insulation material: Polysulfone
 Flammability: UL 94V-0
 Color: Amber

Contact (.010" x .018" x .220 lg)
 Material: Beryllium Copper
 Plating: 30 μ " (.76 μ m) Gold-MIL-G-45204
 Type II, Grade C over 50 μ " (1.3 μ m)
 Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 7 Amps
 Insulation Resistance: $>1 \times 10^9 \Omega$ at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.
 Phone: 1-800-955-4707