




# 4662 Series 729-4662-002A

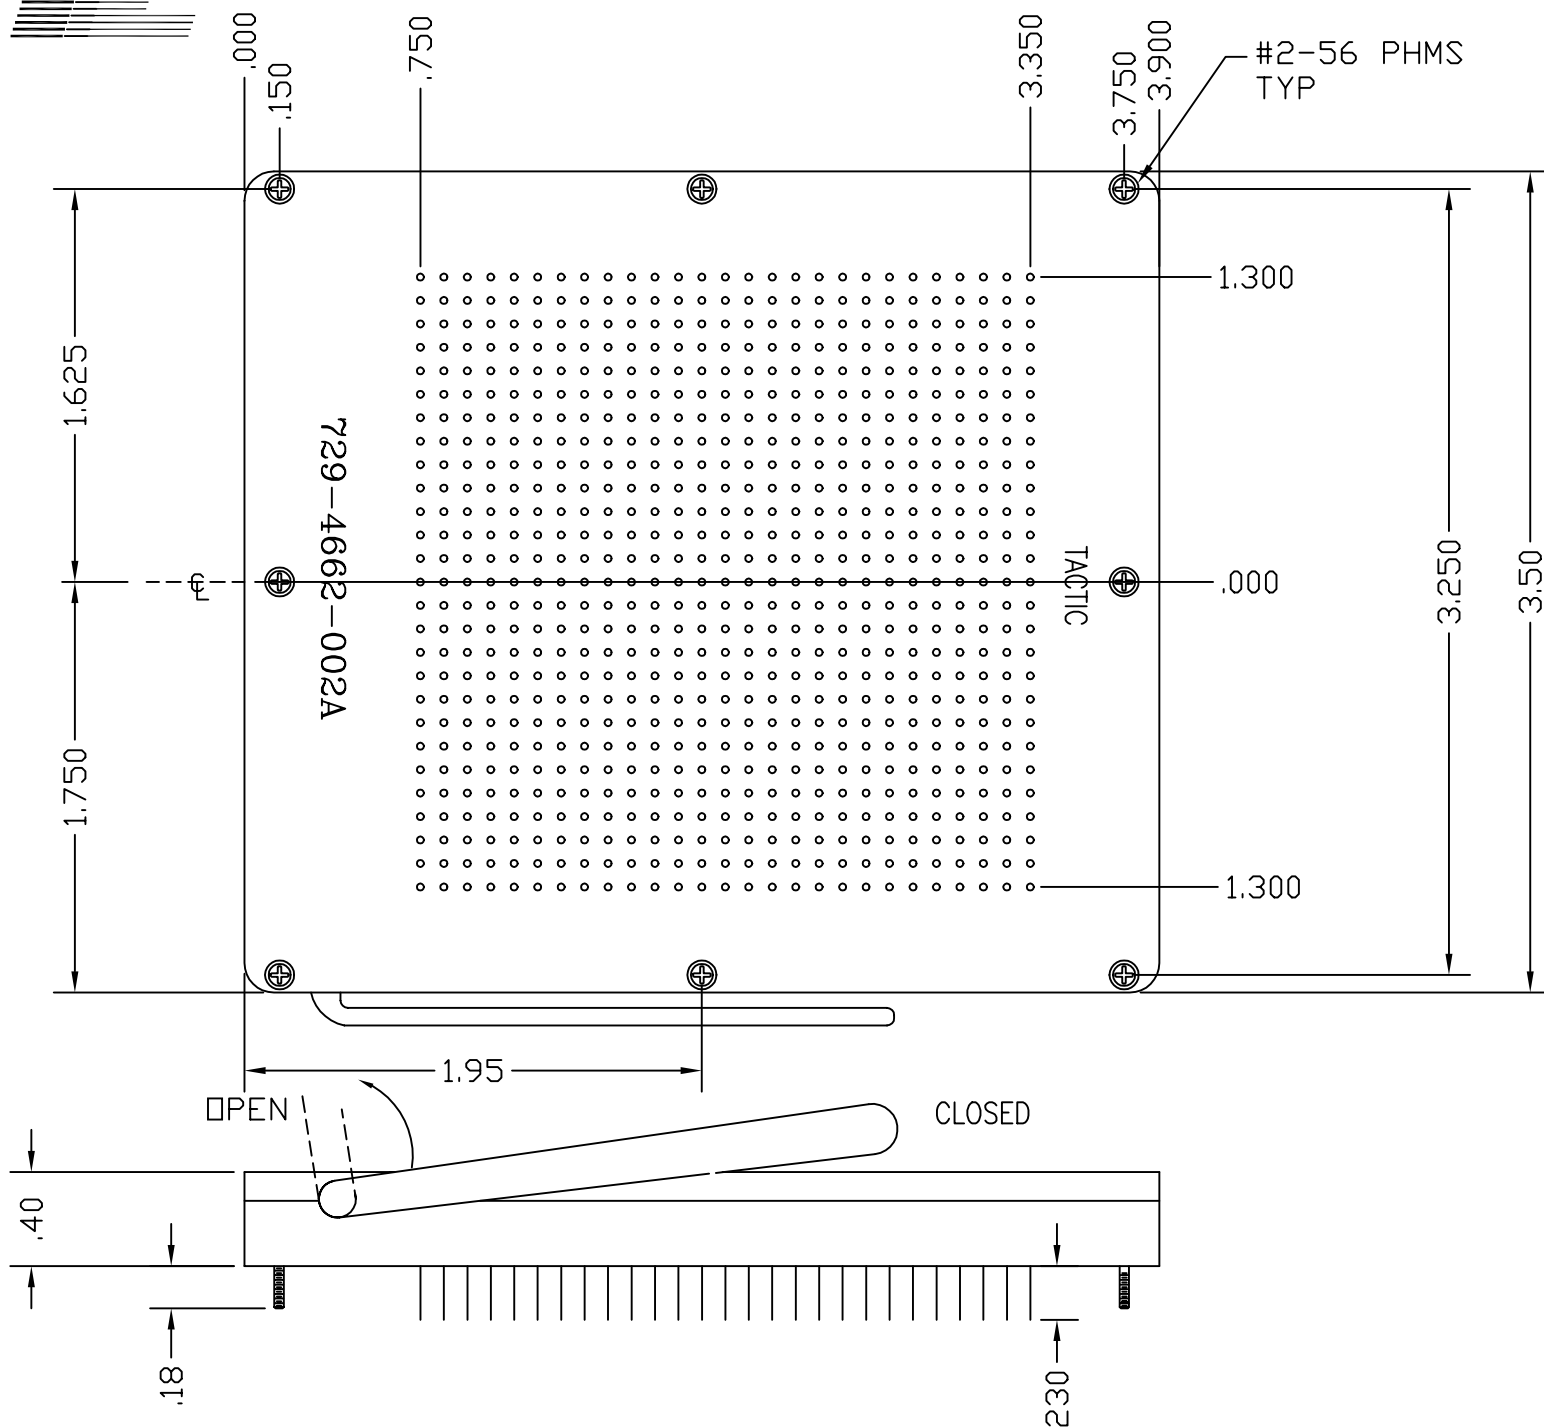

**Physical** Insulation material: Glass Reinforced; Polysulfone  
Flammability: UL 94V-0  
Color: Green

**Electrical** Current Rating: 1 Amp  
Insulation Resistance:  $>1 \times 10^9 \Omega$  at 500Vdc  
Withstanding Voltage: 1000 Vrms at Sea Level

## Environmental

Temperature Rating Operational:  $-67^\circ\text{F}(-55^\circ\text{C})$  to  $+302^\circ\text{F}(+150^\circ\text{C})$

Consult factory or your local TACTIC Distributor for design and pricing.

Phone: 1-800-955-4707 FAX: 1-972-867-6669

Max. working area: 2.5" x 2.5"  
Lead length: .090" min. - .130" max  
Lead size accepted: .018"  $\phi$  - .022"  $\phi$

Contact tail (.13" lg x .010" x .028")  
Material: Beryllium Copper  
Plating: 30  $\mu$ " (.76  $\mu\text{m}$ ) Gold-MIL-G-45204  
Type II, Grade C over 50  $\mu$ " (1.3  $\mu\text{m}$ )  
Sulfamate Nickel per QQ-N-290A